



**Residential and Commercial
Walk Mowers, Lawn Tractors & Zero Turns**



**BRIGGS & STRATTON
CORPORATION**



Easy to Use. Easy to Own.

Snapper® mowers take practical, innovative features and integrate them into a straightforward design that's easy to use and easy to own. It's that simple.



Get More Work Done

With integrated cargo beds (select models) and other time-saving innovations, Snapper mowers are built to help you get the job done.



Straightforward Design

With a straightforward approach Snapper mowers are built to be intuitive, durable, and easy-to-use which empowers you to get more work done.



Dependable Productivity

Snapper mowers feature durable, dependable components like Hydro-Gear® transaxles, Briggs & Stratton® and Kawasaki® engines and long lasting steel mower decks to keep your mower cutting for years to come.



Innovating Classics

Innovations like the Snapper Quiet Series Lawn Mower are 50% quieter* than a standard gas mower.

Genuine. Professional.

Powerful, Practical, and Productive. Snapper Pro® Mowers are where innovation meets common sense practicality to keep you mowing season after season. With powerful engine choices, heavy-duty components and technology, like the iCD™ Cutting System, Snapper Pro mowers are the smart choice for your landscaping needs.



It's All About the Cut

The iCD Cutting System was engineered to produce the best possible cut in a multitude of conditions. Every component works together to achieve superior cut quality.



Designed for Professionals

Our commercial engineering team is experienced and focused on developing equipment that withstands the daily rigors of professional cutters.



Enhance Your Productivity

Mower attachments are essential for when you have a lot of yard work to do. An added collection system, mulch kit, LED light kit or any of the several compatible attachments are likely to make jobs easier and you more productive.



500 Hours Between Oil Changes

The Oil Guard™ system offers major productivity gains by allowing landscape contractors to operate their mower for 500 hours between oil changes. Increasing the oil change interval by 5x means less time spent changing the oil and more time cutting.

Buy a Snapper. Get a Dealer.

Whether you need help picking out the right product or finding the right spark plug, our dealership will provide you the expert product advice and factory-trained service. You can count on us to help you get the right product for your needs and keep it running smoothly for years to come. We offer expert advice and instruction, product selection, test drives, assembly and delivery, service and parts, seasonal maintenance and more.

Snapper Dealer Advantage.



Top Reasons To Choose A Snapper Dealer



Snapper Dealers Are Mower Experts

Dedicated and trained professionals who really understand the Snapper products will give you the ultimate experience you deserve.



Try It Out

Test drive your new mower to learn how to operate it.



Hassle-Free Purchase

Your Snapper Dealer can get you started with your new mower including set-up and delivery.




Service Support When You Need It

Factory-trained service technicians and a stocked parts department will keep you mowing for years to come.



Quiet Series



Quiet Power Technology®

This engine is up to 50% quieter¹ so you can hear what is going on around you and take care of yard work earlier in the day or later in the evening.



Variable Drive Systems

With push, single speed and variable speed self-propelled options, the Quiet Series has the power to help you get the job done. Features vary by model.



ReadyStart® Technology

No prime. No choke. No worries. Just pull for power (model specific).



Just Check & Add™

No oil changes.² Simply check your oil levels and add as you go. Engine maintenance has never been so simple (model specific).



Height-of-Cut

A single point lever easily changes seven height-of-cut adjustment positions from 1.25 to 3.75 inches.



InStart®

InStart technology eliminates the need to pull a cord. Starting your gas engine is as easy as pushing a button (model specific).

Quiet Power Technology is designed to cut sound pollution by up to 50%¹. We've worked hard to design a system that allows you to get the job done earlier in the morning or later in the evening without disturbing your neighbors. Paired with Briggs & Stratton's ReadyStart technology that delivers on our Starting Promise,^{TM,3} this mower takes the work out of yard work.

This line of walk lawn mowers features a 3-in-1 system, allowing you to bag, mulch, or side discharge based on your preference. The single-point height of cut adjustment is a simple, fast and easy way to select your desired lawn height.

Quiet Power Technology.



21725Q 7.25 ft-lbs Gross Torque* 163cc	P21725Q 7.25 ft-lbs Gross Torque* 163cc	P21850Q 8.50 ft-lbs Gross Torque* 190cc	P21850QES 8.50 ft-lbs Gross Torque* 190cc
Briggs & Stratton 725EXi Series™ 3-in-1 System Push ReadyStart®	Briggs & Stratton 725EXi Series 3-in-1 System Single Speed Self Propel ReadyStart	Briggs & Stratton Professional Series™-QPT 3-in-1 System Variable Speed Self Propel ReadyStart	Briggs & Stratton Professional Series-QPT 3-in-1 System Variable Speed Self Propel InStart

*All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.

¹ Compared to traditional gas mowers. Sound levels vary by application.

² Regular maintenance still required. To see complete details refer to your Operator's Manual. Briggs & Stratton standard warranty terms and conditions apply.

³ See www.briggsandstratton.com for complete details.

HI VAC® and NINJA® Series

HI VAC Series



NINJA Series

HI VAC



NINJA

Commercial Series




HI VAC Mower Deck

The HI VAC Mower Deck is made of deep-drawn heavy-gauge steel with a rolled bottom edge which creates vacuum-like suction to pick up grass clippings off of your lawn with ease.



NINJA Mulching System

The NINJA Walk Mower's powerful blade with six cutting surfaces finely mulches grass clippings while the deck blows them back into your yard.

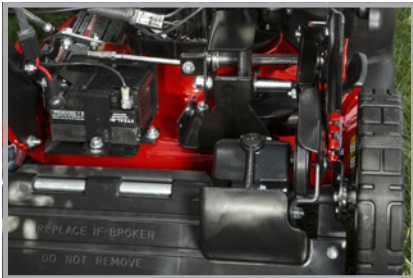

Grass Gripper

Rear-wheel drive improves mower traction. The smooth-turn differential helps ensure easy maneuverability without damaging your grass.



Premium Power

The Briggs & Stratton Professional Series OHV engine delivers professional-grade features including easier starting, smoother and quieter operation, increased durability and a spin-on oil filter for longer life.



High Performance Power

Honda® answers the demands for rugged applications with the GXV160 OHV engine.



Easier to Maneuver

The smooth-turn differential helps ensure easy maneuverability without damaging your grass. The rear-wheel drive helps improve mower traction uneven terrain.



Dependable Power

Briggs & Stratton has delivered power to mowers for decades. Available electric start and standard ReadyStart are just a few of our industry-leading features. Includes a cast-iron sleeve for longer life.



Available Electric Start

Convenient key electric start for easy starting every time. (P2185020E)



Commercial-Grade Features

Whether you're cutting five lawns in a day or just one, the heavy-duty 14-gauge steel mowing deck, reinforced bracing, steel axle and wheels stand up to the task — no matter how tough the job.



Rugged Durability

Rugged steel wheels with ball-bearings provide durability all season long.

2185020 21" HI VAC, Push 8.50 ft-lbs Gross Torque* 190cc	P2185020 21" HI VAC, RWD 8.50 ft-lbs Gross Torque* 190cc	P2185020E 21" HI VAC, RWD 8.50 ft-lbs Gross Torque* 190cc	RP2185020 21" NINJA, RWD 8.50 ft-lbs Gross Torque* 190cc
Briggs & Stratton Professional Series™ OHV Engine	Briggs & Stratton Professional Series OHV Engine	Briggs & Stratton Professional Series OHV Engine With Electric Start	Briggs & Stratton Professional Series OHV Engine
Bagger included. Mulching Kit and Side Discharge Optional	Bagger included. Mulching Kit and Side Discharge Optional	Bagger, Mulching Kit and Side Discharge Included	Mulching Kit and Side Discharge Included, Bagger Optional
	Self-Propelled Rear-Wheel Drive	Self-Propelled Rear-Wheel Drive	Self-Propelled Rear-Wheel Drive

CRP218520 21" NINJA, RWD 8.50 ft-lbs Gross Torque* 190cc	CP215520HV 21" HI VAC, RWD 7.1 ft-lbs Net Torque** 163cc
Briggs & Stratton Professional Series OHV Engine	Honda¹ GXV160 OHV Engine
NINJA Mulching Kit Included. Bagger and Side Discharge Optional.	HI VAC Bagger included. Mulching Kit and Side Discharge Optional.
Self-Propelled Rear-Wheel Drive, Disc Drive Transmission	Self-Propelled Rear-Wheel Drive, Disc Drive Transmission

*All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.
**Power rated by engine manufacturer.
¹ Honda is a trademark of Honda Motor Company.
For a full list of specifications, please see page 39.

SW15

PROFESSIONAL

The SW15 provides a 32" deck for access into small areas and backyard gates. A hydrostatic transmission provides forward and reverse travel directions for enhanced maneuverability – making this an instant favorite for your crew.



2-Year Limited Warranty†

Enhanced Maneuverability.

MODEL	ENGINE (Gross Horsepower/Displacement)	DECK
5901863	Honda GXV390 (10.2*/389cc)	32"
5901864	Honda GXV390 (10.2*/389cc)	32"

* Power rated by engine manufacturer.
† See operator's manual or www.snapper.com for complete warranty details.
Refer to the engine operator's manual for engine warranty details.

ENGINE

- Powered by Honda® GXV390 engine

DRIVE SYSTEM

- Peerless axle with differential chain driven by Hydro-Gear® RT-310 pump and motor
- Flat-free front tires with fixed wheel (5901863) or lockable caster wheel (5901864) configurations
- Ground speed up to 4 mph forward and 2 mph in reverse

MOWER DECK

- Available in 32" cutting widths
- Compact fully-commercial, fabricated, reinforced steel deck
- Dual timed cutting blades
- Aluminum, greaseable spindles
- Cut height: 1.5"- 5" with spring-assisted, single adjustment point lever

CHASSIS

- 13 x 5-6 drive tires

CONTROLS

- Comfortable, single-handed operation with adjustable speed control
- Handlebars are adjustable with four positions for operator comfort

FUEL SYSTEM

- 0.55-gallon fuel tank

OPERATOR CONVENIENCE

- Easy to use forward and reverse lever
- Convenient throttle location

ACCESSORIES

- Cloth Bagger



Variable Hydro-static Drive.



One hand operation with ergonomic travel direction controls and starting.



A commercial-grade, steel timed mower deck has dual timed cutting blades.



Easy cut height adjustment is set with a spring-assisted, single adjustment point lever.



SW15 shown with lockable front caster wheels.

SW25 shown with
CC Controls.



SW25

PROFESSIONAL

Snapper Pro Walk-Behind Mowers will keep you mowing even under the most demanding conditions. Whether shuttling between jobs or maneuvering around obstacles, this walk-behind is a heavy-duty performer in an efficient package.

2-Year Limited Warranty†

Compact Performance.

MODEL	ENGINE (Gross Horsepower/Displacement)	CONTROLS	DECK
5901497	Kawasaki FS600V Electric Start (18.5"/603cc)	Standard	48"
5901436	Kawasaki FS600V Electric Start (18.5"/603cc)	CC	36"
5901498	Kawasaki FS600V Electric Start (18.5"/603cc)	CC	48"

* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
† See operator's manual or www.snapper.com for complete warranty details.
Refer to the engine operator's manual for engine warranty details.

ENGINE

- Powered by Kawasaki® FS engine
- Electric and manual start available

DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3100® Transaxles feature 7" cooling fans that assist with repelling debris
- Dual hydro fluid reservoirs and hydro filters
- Heavy-duty transmission guards reduce build up of debris to improve air flow and allow for access to the filter for maintenance
- Flat-free caster tires
- Ground speed up to 6 mph

MOWER DECK

- Available in 36" or 48" cutting widths
- Optimized fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge on 36" models
- Cast-aluminum spindles
- Cut height: 1.5" - 4.5", finite adjustment using pin style height of cut
- Debris shields on idler pulleys extend bearing life

CHASSIS

- Heavy-duty 1.5" x 2" 11-gauge frame rails, one piece frame
- Dedicated tie-down points, located in the front and rear, makes securing equipment convenient
- 20 x 7-10 drive tires

CONTROLS

- CC Centralized Controls or standard control options available

FUEL SYSTEM

- Rugged 5-gallon fuel tank
- Top-mounted fuel pick-up with Viton® Seals

OPERATOR CONVENIENCE

- Centralized foot control for neutral position
- Easy-to-reach cruise control bar
- Comfortable easy-to-use operator controls
- Momentary PTO switch allows the operator to stop the mower blades while the engine continues to run - simply step on the foot pedal or pull the Cruise Control bar and release the controls

ACCESSORIES

- Fabric grass catcher, metal grass catcher, mulch kit, professional stripe kit (48"), weight kit



Adjust the mower's speed without removing your hands from the control handles with the improved, ready-access cruise control bar. A convenient speed indicator is placed within direct view on the control panel.



Brake handle is conveniently located beside the control panel, providing instant access with minimal operator effort to engage.



Foot pedal for neutral position provides the operator with more natural control. The neutral position is identified on the speed indicator on the dash.



Need to walk away from the mower to move an obstacle or debris? The new PTO switch allows the operator to stop the mower blades in a single step – simply put the machine in neutral and release the controls. The blades will disengage while the engine continues to run.

SW25 shown with
standard controls.





SW35 shown with standard controls.

SW35 PROFESSIONAL

The SW35 delivers reliable cutting performance in diverse conditions. Built to run sunrise to sundown, this walk-behind is a productive performer for any size mowing crew.

2-Year Limited Warranty†




Robust 1/4" steel engine deck construction provides mounting area for bulky attachments.



Deck drive belt system is designed to provide even belt tension which improves the life of the belt and reduces maintenance.



Reliably set your speed with the improved easy-to-reach cruise control bar featuring a speed indicator. Conveniently located brake handle.



Set cutting height in one easy step using the quick-adjust crank.

ENGINE

- Powerful Kawasaki® FX651V engine
- Electric start standard
- Two-stage industrial remote air-cleaner
- Easy-to-use oil drain

DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3100 Transaxles feature 7" cooling fans that assist with repelling debris
- Dual hydro fluid reservoirs and hydro filters
- Narrow transmission guards reduce build up of debris to improve air flow and allow for access to the filter for maintenance
- Flat-free caster tires
- Ground speed up to 7 mph

MOWER DECK

- Larger discharge opening for improved dispersing of grass clippings
- Available in 48", 52" or 61" cutting widths
- Fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge
- Aluminum spindles with greaseable bearings for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly
- The mower deck mounting system provides easier deck leveling, improved flexibility over terrain, and more durable wear points for reduced maintenance
- Cut height: 1.5"- 4.75", with infinite positioning using the quick-adjust crank
- Debris shields on idler pulleys extend bearing life

CHASSIS

- Heavy-duty 1.5" x 2" 11-gauge frame rails
- Dedicated tie-down points, located in the front and rear, makes securing equipment convenient

CONTROLS

- CC™ Centralized Controls or standard control options available

FUEL SYSTEM

- Rugged 5-gallon fuel tank
- Top-mounted fuel pick-up with Viton Seals

OPERATOR CONVENIENCE

- Centralized foot control for neutral position
- Easy-to-reach cruise control bar
- Comfortable easy-to-use operator controls
- Momentary PTO switch allows the operator to stop the mower blades while the engine continues to run. Simply put the machine in neutral and release the controls

ACCESSORIES

- Fabric grass catcher, metal grass catcher, mulch kit, LED light kit, professional stripe kit, weight kit

† See operator's manual or www.snapper.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

MODEL	ENGINE (Gross Horsepower/Displacement)	CONTROLS	DECK
5901317	Kawasaki FX651V (20.5* /726cc)	Standard	48"
5901316	Kawasaki FX651V (20.5* /726cc)	Standard	52"
5901261	Kawasaki FX651V (20.5* /726cc)	CC	48"
5901231	Kawasaki FX651V (20.5* /726cc)	CC	52"
5901232	Kawasaki FX730V (23.5* /726cc)	Standard	61"

* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

Smooth Operators.

The design of the CC Centralized Controls places the operator's hands in the ideal position to access all in-demand controls. Ergonomic operator presence, steering and reverse levers on both handles operate with a light touch to reduce operator fatigue.






Rear Engine Rider



Tried and True
Some dependable designs are ingeniously simple. Snapper's disc drive transmission uses a spinning plate to power a moveable rubber disc.



HI VAC Mower Deck
Similar to a vacuum, the HI VAC mower deck efficiently cuts and vacuums up grass clippings for a clean finish. The unique blade and rolled deck edge generates a large volume of air and creates suction.



Optional NINJA Mulching Blade
Finely mulch your grass with our exclusive NINJA Blade that features six powerful cutting surfaces. While the blade mulches the grass clippings, the deck design blows them back into the lawn.



Getting Started
Briggs & Stratton engines offer the reliability you can count on when mowing the lawn.



Easy-to-Use Design
After over 50 years of proven performance, the rear engine rider has been engineered to maintain tried and true features that the Snapper brand is known for. An easy-to-use design with enhanced features still delivers the same dependability you would expect from a mowing icon.



Vertical Stand-On-Edge Capability
Take up less room in storage and make deck maintenance simple by taking advantage of the vertical stand-on-edge capability.

2691525 28" Deck 11.5 Gross HP*	2691526 33" Deck 15.5 Gross HP*
344cc Briggs & Stratton Intek™ Engine	500cc Briggs & Stratton Intek Engine
HI VAC Mower Deck	HI VAC Mower Deck
Articulating Frame with Disc Drive Transmission	Articulating Frame with Disc Drive Transmission

See What Snapper Owners Are Saying:

★★★★★ 5 out of 5 stars
Small footprint in my garage, GREAT job on my lawn!
“LOVE the handling, speed range (especially with notched shift plate), easy change from side chute to mulch, and small storage space needed in my garage. Best rider I've owned for my 1/3 acre yard.” -*Snapper John*

To read more customer reviews like this visit www.snapper.com

An American Classic Reborn.



*All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton. For a full list of specifications, please see page 40. Attachment listing, please see page 34.

SPX™ Series



Step Up to High Value

Steel construction including the hood, cast-iron front axle and a hydrostatic transmission are hallmarks of SPX Tractors. The now standard steel front bumper provides added durability.



Quick-Adjust Cutting Height

Easy-to-use height-of-cut controls adjust the mower deck for changing grass conditions.



Fabricated Mower Decks

The durable 42" and 48" fabricated mower decks feature welded, heavy-duty steel for non-stop mowing season-after-season. All fabricated decks come with a limited lifetime warranty.*



Step On It

Our responsive foot pedals give you hands-free control over forward and reverse speed. The dash mounted cruise control lets you comfortably set your speed.



Turning Perfection

With a 14" turning radius, you can spend less time mowing and more time enjoying your yard.



Illuminating LED Headlights

LED headlights brighten your path when mowing at dawn or dusk.

SPX 23/42 42" Deck 23.0 Gross HP*	SPX 23/46 46" Deck 23.0 Gross HP*	SPX 25/42 42" Fabricated Deck 25.0 Gross HP*	SPX 25/48 48" Fabricated Deck 25.0 Gross HP*
724cc Briggs & Stratton Intek V-Twin Engine Tuff-Torq® K46 Hydrostatic Transmission	724cc Briggs & Stratton Intek V-Twin Engine Tuff-Torq K46 Hydrostatic Transmission	724cc Briggs & Stratton Professional Series V-Twin Engine Tuff-Torq K46 Hydrostatic Transmission	724cc Briggs & Stratton Professional Series V-Twin Engine Tuff-Torq K46 Hydrostatic Transmission

*All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
†See operator's manual or www.snapper.com for complete warranty details.
For a full list of specifications, please see page 40-41.
Attachment listing, please see page 34.

See What Snapper Owners Are Saying:

★★★★★ 5 out of 5 stars
Great Ride

“The performance is simply awesome. This is a very well thought out machine. Turn radius is as advertised, plus the mower is comfortable to operate.” - *Glennj*

To read more customer reviews like this visit www.snapper.com

Straightforward Design.



360Z



Compact Footprint

36-inch compact fabricated deck options make it easy to navigate even the tightest parts of your lawn and takes up less space when in storage.



Commercially-Inspired

A fully-welded steel frame, thick-walled front axle, durable mower deck, long-lasting caster spindles ensure durability and a great cut.



Engine Options

High performance engine options include Briggs & Stratton Professional Series with ReadyStart technology, and the Kawasaki FR series making sure your zero turn mower has the power to perform year after year.



More Than Just a Zero Turn

Snapper's first dirt-hauling, tool-toting, flower-delivering and, of course, grass-cutting zero turn mower. The integrated cargo bed[†] provides on-the-go versatility and convenience. Plus, the rail system is compatible with numerous third-party UTV/ATV accessories for added utility around your yard.

360Z 19/36 36" Fabricated Deck 19.0 Gross HP**	360Z 18/36 36" Fabricated Deck 18.0 Gross HP*	360Z 23/46 46" Deck 23.0 Gross HP**
--	---	---

500cc Briggs & Stratton Professional Series OHV Engine
Hydro-Gear EZT[†] Hydrostatic Transaxles

603cc Kawasaki FR600V V-Twin OHV
Hydro-Gear EZT Hydrostatic Transaxles
Optional Cargo Bed[†]

724cc Briggs & Stratton Professional Series V-Twin OHV
Hydro-Gear EZT Hydrostatic Transaxles
Optional Cargo Bed[†]

360Z 21.5/42 42" Fabricated Deck 21.5 Gross HP*	360Z 23/42 42" Fabricated Deck 23.0 Gross HP**	360Z 21.5/48 48" Fabricated Deck 21.5 Gross HP*	360Z 23/48 48" Fabricated Deck 23.0 Gross HP**	360Z 25/52 52" Fabricated Deck 25.0 Gross HP**	360Z 21.5/52 52" Fabricated Deck 21.5 Gross HP*
---	--	---	--	--	---

726cc Kawasaki FR Series V-Twin Engine
Hydro-Gear EZT Hydrostatic Transaxles
Optional Cargo Bed[†]

724cc Briggs & Stratton Professional Series V-Twin Engine with ReadyStart
Hydro-Gear EZT Hydrostatic Transaxles
Optional Cargo Bed[†]

726cc Kawasaki FR Series V-Twin Engine
Hydro-Gear EZT Hydrostatic Transaxles
Cargo Bed[†]

724cc Briggs & Stratton Professional Series V-Twin Engine with ReadyStart
Hydro-Gear EZT Hydrostatic Transaxles
Cargo Bed[†]

724cc Briggs & Stratton Professional Series V-Twin Engine with ReadyStart
Hydro-Gear ZT-2800 Hydrostatic Transaxles
Cargo Bed[†]

726cc Kawasaki FR Series V-Twin Engine
Hydro-Gear ZT-2800 Hydrostatic Transaxles
Cargo Bed[†]

*All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
**All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
†See operator's manual or www.snapper.com for complete warranty details.
‡50 lb. capacity, do not overload; do not carry passengers. Available on select models. See operator's manual for details. Additional cargo bed accessories sold separately. Ask dealer for details. For a full list of specifications, please see page 42-43. Attachment listing, please see page 34.

See What Snapper Owners Are Saying:

★★★★★ 5 out of 5 stars
Best Mower I've Ever Had

"Bought this mower... and it is great. Our yard is about 3 acres and while I've had some good mowers, this one is the best. This is the first zero turn mower I've ever had, and it has shortened my mowing time down to 1 1/2 hour. It used to take me about 3 hours. Wished I'd bought one sooner." - Catfish

www.snapper.com

New Levels of Versatility.



S40

ENGINE

- Choose from Kawasaki® FR651V or Briggs & Stratton Commercial Series engine options
- Patented advanced debris management system (Briggs & Stratton Commercial Series engine models)
- Two-stage industrial remote air-cleaner (Kawasaki models)
- Easy access oil drain

DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-2800® transaxles feature 7" cooling fans that assist with repelling debris
- Pneumatic caster tires
- Ground speeds up to 8 mph

MOWER DECK

- Available in 48" cutting widths
- Optimized fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge
- Aluminum spindles feature a 1" shaft with greaseable commercial oversized, double row ball bearings with bottom access grease fittings
- Durable 0.25" Marbain® steel blades
- Cut Height: 1.5" – 4.5" adjusts in 0.25" increments
- Debris shield on idler pulleys extend bearing life

CHASSIS

- Heavy-duty 1.5" – 2", 11-gauge frame rails
- Mid-back seat features enhanced bolstering in seat
- Removable floor pan
- Heavy-duty bumper protects engine compartment

FUEL SYSTEM

- Rugged, 5.5-gallon impact resistant fuel tank
- Extra large filler neck

OPERATOR CONVENIENCE

- Comfortable thicker 1" tubular steering control levers
- Flip-up seat for easy access
- Ergonomic control panels

ACCESSORIES

- Mulch kit, service jack



4-Year or 500 Hours Limited Warranty[†]

[†] See operator's manual or www.snapper.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

MODEL

5901738
5901739

ENGINE (Gross Horsepower/Displacement)

Kawasaki FR651V (21.5*/651)
Briggs & Stratton Commercial Series (23**/724)

DECK


48"
48"

* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
** All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

Affordable Durability.



Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



Hydro-Gear ZT-2800 Drive System is designed for high performance and is fully serviceable.



48" fabricated mower deck with reinforced top, corners, side skirts, and leading edge.



Turf-friendly 20" drive and 11" caster tires.

The S40 is a compact and built with commercial-grade components for a long life. Its compact size allows it to navigate tight areas with ease and a large fuel capacity allows more mowing between fill ups. This unit is a perfect match of commercial-grade quality and value.



S50xt

PROFESSIONAL



2+2 Year Limited Warranty†

The compact, easy-to-use S50xt zero-turn mower is designed specifically for the daily rigors of commercial mowing. This mower may be small in size, but it's big on features.

Compact & Tough.

MODEL

5901609
5901610
5901611
5901612

ENGINE (Gross Horsepower/Displacement)

Kawasaki FX600V (19*/603cc)
Briggs & Stratton Commercial Series (25**/724cc)
Kawasaki FX600V (19*/603cc)
Briggs & Stratton Commercial Series (25**/724cc)

DECK

36"
36"
48"
48"

* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
** All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
† See operator's manual or www.snapper.com for complete warranty details.
Refer to the engine operator's manual for engine warranty details.

ENGINE

- Choose from Kawasaki® FX600V or Briggs & Stratton Commercial Series engine options
- Patented advanced debris management system (Briggs & Stratton Commercial Series models).
- Two-stage industrial remote air-cleaner (Kawasaki models)
- Easy access oil drain

DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3100 Transaxles feature 7" cooling fans that assist with repelling debris
- Dual hydro fluid reservoirs and hydro filters
- Pneumatic caster tires
- Ground speed up to 7 mph

MOWER DECK

- Available in 36" or 48" cutting widths
- iCD Cutting System on 48" models
- Optimized fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge on 36" models
- Cast-aluminum spindles feature 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valve
- Durable, 0.25" Marbain® Steel blades
- Cut height: 1.5"- 4.5", adjusts in 0.25" increments
- Debris shields on idler pulleys extend bearing life

CHASSIS

- Heavy-duty 1.5" x 2", 11-gauge frame rails
- Mid-back seat features enhanced bolstering in seat, with armrests for added comfort, and offers adjustable fore and aft positioning
- Removable floor pan
- Heavy-duty bumper protects engine compartment

FUEL SYSTEM

- Twin 4-gallon rugged, impact resistant fuel tanks with switch for fuel source (excludes 5901610)
- Single 4-gallon rugged, impact resistant fuel tank (5901610)
- Extra large filler neck(s)
- Top mounted fuel pick-up with Viton Seals

OPERATOR CONVENIENCE

- Comfortable thicker 1" tubular steering control levers
- Flip-up seat for easy access
- Ergonomic control panels

ACCESSORIES

- Collection system (48"), fabric grass catcher (36"), metal grass catcher (36"), mulch kit, trailer hitch kit, light kit, flat-free caster tires, professional stripe kit (48"), service jack




The easy-to-use deck-lift takes the effort out of adjusting cut height. Cutting height ranges from 1.5" - 4.5" in 0.25" increments.



Features greaseable cast-aluminum spindles for longer usable life.



Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



Hydro-Gear ZT-3100 Drive System is designed for high performance and is fully serviceable.



S120



4-Year or 500 Hours Limited Warranty†

With powerful engine choices, 52" or 61" iCD Cutting System mower deck options and speeds up to 10mph, the S120 zero-turn mower will cut your job down to size. The heavy-duty components, including the commercial Hydro-Gear ZT3200 transaxles, will keep you mowing season after season.

Value & Performance.

MODEL

5901867
5901865
5901862
5901868

ENGINE (Gross Horsepower/Displacement)

Briggs & Stratton Commercial Series (25*/724cc)
Kawasaki FR730V (24**/726cc)
Briggs & Stratton Commercial Series (25*/724cc)
Kawasaki FR730V (24**/726cc)

DECK

52"
52"
61"
61"

* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton
** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki
† See operator's manual or www.snapper.com for complete warranty details.
Refer to the engine operator's manual for engine warranty details.

ENGINE

- Choose from Briggs & Stratton Commercial Series or Kawasaki® FR730V engine options
- Patented advanced debris management system (Briggs & Stratton Commercial Series models)
- Easy-to-use oil drain

DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3200 Transaxles feature 7" cooling fans that assist with repelling debris
- Pneumatic caster tires
- Ground speed up to 10 mph

MOWER DECK

- Available in 52" or 61" cutting widths
- iCD Cutting System
- Features cast-aluminum spindles with greaseable 2.5" diameter ball bearings
- Cut height: 1.5"- 5", adjusts in 0.25" increments
- Debris shields on idler pulleys extend bearing life

CHASSIS

- Heavy-duty 1.5" x 2", 11-gauge frame rails
- Removable floor pan
- Heavy-duty bumper protects engine compartment

FUEL SYSTEM

- Single 5-gallon rugged, impact resistant fuel tank
- Extra large filler neck
- Top mounted fuel pick-up with Viton Seals

OPERATOR CONVENIENCE

- Deluxe mid-back seat with arm rests
- Comfortable thicker 1" tubular steering control levers
- Flip-up seat for easy access
- Ergonomic control panels with cup holder and storage compartment
- Control system provides smooth, precise steering

ACCESSORIES

- Collection system, mulch kit, hitch kit, ROPS mounted LED light kit, flat-free caster tires, professional stripe kit, service jack



The easy to use deck lift takes the effort out of adjusting cut height. Cutting height ranges from 1.5" – 5" in 0.25" increments.



Hydro-Gear ZT-3200 Commercial Engineered Drive System is designed for high performance and is fully serviceable.



Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



The Briggs & Stratton Commercial Series Engine features a patented advanced debris management system which deflects dirt and debris from the engine, and any remaining debris is trapped in the high-capacity, dual-sealing air cleaner cartridge.



S200xt
PROFESSIONAL



2+2 Year Limited Warranty[†] | 3-Year Limited Belt Warranty[†]



Vanguard engines with Oil Guard System reduce oil maintenance time and costs by up to 60%.[‡]



Dual, commercial Hydro-Gear ZT-5400 Powertrain® Transaxles deliver unmatched power and durability.



The easy-to-use deck-lift takes the effort out of adjusting cut height. Cutting height ranges from 1.5" - 5" in 0.25" increments.



Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.

ENGINE

- Choose from Kawasaki® FX801V, Briggs & Stratton Commercial Series, Vanguard 810 EFI with **Oil Guard System**, Vanguard BIG BLOCK™ with **Oil Guard System**, or Vanguard BIG BLOCK EFI with **Oil Guard System** engine options
- Patented advanced debris management system (Briggs & Stratton Commercial Series models)
- Two-stage industrial air-cleaner (Vanguard and Kawasaki models)
- Easy access oil drain

DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-5400 Powertrain Transaxles feature 9" cooling fans that assist with repelling debris
- Dual hydro fluid reservoirs and hydro filters
- Pneumatic caster tires
- Five-bolt pattern wheels
- Ground speed up to 10 mph

MOWER DECK

- Available in 61" or 72" cutting widths
- iCD™ Cutting System
- 2-belt drive system that improves belt life and is more dependable (excludes 5901280)
- Cast-iron spindles with greaseable bearings for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly (61" models)
- Hercules™ II Spindles; 10" diameter cast-iron with industrial double row angular contact ball bearings with 1 3/16" diameter shaft (72" model)
- Cut height: 1.5" – 5", adjust in 0.25" increments
- Debris shields on idler pulleys extend bearing life

CHASSIS

- Heavy-duty 2" x 2" 7-gauge frame rails
- Removable floor pan
- Heavy-duty bumper protects engine compartment

FUEL SYSTEM

- Twin 5-gallon rugged, impact resistant fuel tanks with switch for fuel source (excludes model 5901280)
- Single 5-gallon rugged, impact resistant fuel tank (5901280)
- Extra large filler neck(s)
- Top-mounted fuel pick-up with Viton Seals

OPERATOR CONVENIENCE

- Deluxe high-back suspension seat on Oil Guard models (5901665, 5901666, & 5901667)
- Premium mid-back adjustable seat with padded arm rests (5901280 & 5901664)
- Comfortable thicker 1" tubular steering control levers
- Flip-up seat for easy access
- Ergonomic control panels with cup-holder and storage compartment

ACCESSORIES

- Collection system (61"), mulch kit, trailer hitch kit, ROPS mounted LED light kit, flat-free caster tires, professional stripe kit, service jack

3-YEAR BELT LIMITED WARRANTY[†]

- The limited warranty for the 2-belt mowers decks provides coverage for three years (36 months) or 300 hours, whichever occurs first. It covers parts & labor in year one and parts only in years two and three. (excludes model 5901280)

Productivity
Redefined.

The S200xt is equipped to ride for a full day of work with impressive features and premium components. Available with our iCD Cutting System deck in 61" and 72" cutting widths, the S200xt will cut your big jobs down to size. This machine delivers maximum performance and productivity.



MODEL	ENGINE (Gross Horsepower/Displacement)	DECK
5901664	Kawasaki FX801V (25.5*/852cc)	61"
5901280	Briggs & Stratton Commercial Series (27"/810cc)	61"
5901665	Vanguard 810 EFI with Oil Guard System (28"/810cc)	61"
5901666	Vanguard BIG BLOCK EFI with Oil Guard System (37"/993cc)	61"
5901667	Vanguard BIG BLOCK EFI with Oil Guard System (37"/993cc)	72"

* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
** All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
† See operator's manual or www.snapper.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.
‡ Cost savings based on standard oil maintenance with 100 hour interval versus Oil Guard™ System 500 hour service interval.

[†] See operator's manual or www.snapper.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



SS100

PROFESSIONAL

2+2 Year Limited Warranty[†] | 5-Year Limited Suspension Warranty[†] | 3-Year Limited Transaxle Warranty[†]

The SS100 offers the added productivity of a stand-on unit in a compact package. It is built for navigating through tight gates or loading on small trailers. This unit pushes the limits of productivity and value for the commercial landscaper.

Compact Performance.

MODEL	ENGINE (Gross Horsepower/Displacement)	DECK
5901800	Kawasaki FX600V (19*/603)	36"
5901801	Vanguard V-Twin OHV (23**/627)	48"

* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
** All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
[†] See operator's manual or www.snapper.com for complete warranty details.
Refer to the engine operator's manual for engine warranty details.

ENGINE

- Choose from Kawasaki® FX600V or Vanguard V-Twin OHV engine options
- Patented advanced debris management system (Vanguard engine models)
- Easy access oil drain

DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3400 transaxles feature 7" cooling fans that assist with repelling debris
- 11 x 4-5 flat-free caster tires
- Ground speeds up to 8 mph

MOWER DECK

- Available in 36" and 48" cutting widths
- iCD cutting system (48" deck)
- Optimized fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge (36" deck)
- Cast-aluminum spindles feature a 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valves
- Durable 0.25" Marbain® steel blades
- Cut Height: 1.75" - 4.5", adjusts in 0.25" increments
- Debris shield on idler pulleys extend bearing life

CHASSIS

- Heavy-duty frame rail – 1.5 x 2 x 11 gauge
- Ergonomic design for standing comfort
- Superior balance provides stability and maneuverability

FUEL SYSTEM

- Centrally mounted 6-gallon fuel tank
- Extra large filler neck

OPERATOR CONVENIENCE

- Easy-locking 3-position speed control
- PTO conveniently disengages when the operator leaves the platform to move an obstacle or pick up debris and re-engages when the operator steps back onto the platform and re-activates the PTO switch
- The operator suspension platform system is adjustable for a large range of weights and operating conditions, optimizing operator comfort and increasing productivity

ACCESSORIES

- Metal grass catcher, mulch kit, LED light kit



The suspension platform system is adjustable for a large range of weights and operating conditions, optimizing operator comfort and increasing productivity.



The PTO conveniently disengages when the operator leaves the platform to move an obstacle or pick up debris. When the operator steps back onto the platform and re-engages the PTO switch, the blades start again for continued mowing.



The easy locking 3-position speed control setting is conveniently located and requires no tools to facilitate smooth operation in a wide range of conditions.



SS200 PROFESSIONAL

The SS200 balances stability with maneuverability for a unit that takes traction and handling to the next level. An adjustable operator platform with suspension optimizes operator comfort and increases productivity, allowing custom operation in a variety of conditions.

2+2 Year Limited Warranty[†] | 5-Year Limited Suspension Warranty[†] | 3-Year Limited Transaxle Warranty[†]

ENGINE

- Vanguard 810 EFI w/Oil Guard System engine
- Two-stage industrial air cleaner
- Oil Guard System extends oil change intervals to 500 hours
- Easy access oil drain

DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3800® transaxles with standard oil coolers feature
- 13 x 5-6 flat-free caster tires
- Ground speeds up to 10 mph

MOWER DECK

- Available in 52" and 61" cutting widths
- iCD cutting system
- Cast-aluminum spindles feature a 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valves (52" deck)
- Cast-iron spindles with greaseable bearings for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly (61" deck)
- Durable 0.25" Marbain® steel blades
- Cut Height: 1.75" – 5", adjusts in 0.25" increments
- Debris shield on idler pulleys extend bearing life

CHASSIS

- Heavy-duty frame rail – 1.5 x 2 x 11 gauge
- Ergonomic design for standing comfort
- Superior balance provides stability and maneuverability

FUEL SYSTEM

- Centrally mounted 8-gallon fuel tank
- Extra large filler neck


OPERATOR CONVENIENCE

- Easy-locking 3-position speed control
- PTO conveniently disengages when the operator leaves the platform to move an obstacle or pick up debris and re-engages when the operator steps back onto the platform and re-activates the PTO switch
- The operator suspension platform system is adjustable for a large range of weights and operating conditions, optimizing operator comfort and increasing productivity

ACCESSORIES

- Metal grass catcher (52" deck only), mulch kit, LED light kit

[†] See operator's manual or www.snapper.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



The PTO conveniently disengages when the operator leaves the platform to move an obstacle or pick up debris. When the operator steps back onto the platform and re-engages the PTO switch, the blades start again for continued mowing.



The easy locking 3-position speed control setting is conveniently located and requires no tools to facilitate smooth operation in a wide range of conditions.



The suspension platform system is adjustable for a large range of weights and operating conditions, optimizing operator comfort and increasing productivity.



Next Level Traction.



MODEL

5901861
5901860

ENGINE (Gross Horsepower/Displacement)

Vanguard 810cc EFI with **Oil Guard System** (28*/810)
Vanguard 810cc EFI with **Oil Guard System** (28*/810)

DECK

52"
61"

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

It's Easy to Get Attached.

When it comes to yard care, mowing is not always enough. Sometimes you want a variety of tools at your fingertips to complete the broad range of tasks for a great looking yard.

		Rear Engine Riders & Lawn Tractors		Zero Turn Mowers
CATCHERS & COLLECTION SYSTEMS	ATTACHMENT	Rear Engine Rider	SPX™	360Z
	Mulcher Kit	NINJA® Mulching Blade	42", 46", 48"	36", 42", 46", 48", 52"
	Single Catcher*	5-bu. (28", 33" mower - requires bagging blade)	N/A	N/A
	Twin Catcher*	N/A	6.5-bu. (42" mower)	6.5-bu. (36", 42", 46", 48", 52" mower)
	Deck Adapter Kit	N/A	N/A	36", 42", 46", 48" mower (needed for use with Twin Catcher)
	Triple Catcher	N/A	10-bu. (46", 48" mower)	N/A
	Turbo Attachment	N/A	46", 48" mower	52" mower
	Striping Kit	N/A	N/A	N/A
MULTIPURPOSE ATTACHMENTS	Dump Cart	10-cu. ft.	10-cu. ft.	10-cu. ft.
	Front & Rear Weight Carriers	N/A	Available	N/A
	Suitcase Weights	N/A	33-lb.	N/A
	Quick Attach Rear Wheel Weights	N/A	31-lb.	N/A
	Hitch Kit	N/A	(Standard)	36" Req. Accessory (Not Standard)
	Headlight Kit	N/A	N/A	Available
	Arm Rest Kit	N/A	Available	Available
	Cargo Bed**	N/A	N/A	(Standard on 48", 52")
	Cargo Bed Rhino Grips	N/A	N/A	Compatible with Cargo Bed**
	Mesh Seat Kit	N/A	N/A	Available
	Hour Meter Kit	N/A	(Standard)	(Standard)
	Caster Tire, Flat Free Kit	N/A	N/A	N/A
	Dust Cover	Available	Available	N/A
	Front Bumper	N/A	Standard	N/A
SNOW REMOVAL ATTACHMENTS	Single-Stage Snow Blower	N/A	42"	N/A
	Snow Cab	N/A	Soft Side (All Vinyl)	N/A
GROUND ENGAGING ATTACHMENTS	Tiller	N/A	36" Gas-Powered Tow-Behind	N/A
	Dozer Blade	N/A	42" Includes Hitch & Lever	N/A
	Dethatcher	N/A	40" Tow-Behind	N/A

*Select collection systems for zero turn models are available with or without a turbo.
**50-lb. (360Z) or 100-lb. (560Z) capacity, do not overload; do not carry passengers. Standard on most models. See operator's manual for details.

Note: Attachments for previous year models and additional attachments through allied equipment manufacturers not shown may be available. Some attachments require additional installation components (i.e. front weights for catchers). Please see dealer for details.



Mulch Kit
Select kits include dedicated mulching blades, baffles, hardware and instruction sheet.



Trailer Hitch Kit
Will accept a 1/2" shank ball and comes complete with hardware.



LED Light Kit
Energy efficient LED light kit with simple installation.



Flat-Free Caster Tires
Run all day with no flats, eliminates downtime. Standard on walk-behind models.




SW15 Cloth Bagger
A cloth catcher with 7' hose and 90° inlet makes attaching and removing easy. Capacity: 2.5 bushels.



Professional Stripe Kit
Rubber flap system lays down grass to create patterns across the landscape.



Fabric Grass Catcher
A lightweight durable 3.75 bushels, fabric bag with hard plastic bottom attaches quickly.

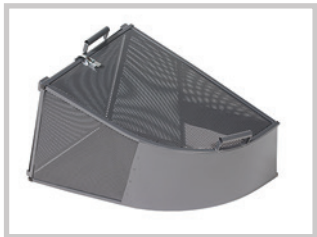

Metal Grass Catcher
Rugged steel framed catcher has handles that make attaching and removing a breeze. Capacity: 3.5 bushels. (Select models)





Service Jack
Heavy duty steel bracket and jack allow for easy and convenient access to under the deck.




Sulky
One-wheel and two-wheel options for use with walk behind models.

Collection Systems

		S200xt	S120	S50xt	S40
	DOUBLE BAG HARD TOP Innovative molded hard top design allows for increased capacity. Simple to install. Each heavy-duty mesh bag has an integrated handle to assist with removal. Capacity: 10 cubic feet	N/A	TURBO-PRO™ 52" Deck	TURBO-PRO™ 48" Deck	TURBO-PRO™ 48" Deck
	TRIPLE BAG SOFT TOP Simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 12.5 cubic feet	TURBO-PRO™ MAX 61" Deck FAST-VAC® 61" Deck	N/A	N/A	N/A
	TRIPLE BAG HARD TOP Innovative molded hard top design allows for increased capacity. Simple to install. Each heavy-duty mesh bag has an integrated handle to assist with removal. Capacity: 15 cubic feet	TURBO-PRO™ MAX 61" Deck	TURBO-PRO™ 52"/61" Deck	N/A	N/A
	ELECTRIC DFS (Dump From Seat) Simply flip the switch on the control panel to release the hopper right from your seat. Capacity: 12.5 cubic feet	TURBO-PRO™ MAX 61" Deck FAST-VAC® 61" Deck	N/A	N/A	N/A

		S200xt
	EZ DUMP™ (Dump From Seat) Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped. Capacity: 12 cubic feet	TURBO-PRO™ MAX 61" Deck FAST-VAC® 61" Deck
	EZ DUMP XL™ (Dump From Seat) Ideal for larger jobs. Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped. Capacity: 14 cubic feet	TURBO-PRO™ MAX 61" Deck



EZ DUMP WINCH

This hand operated winch makes installing and uninstalling the EZ Dump and EZ Dump XL easy and convenient for a single person and is standard with both hopper options.


TURBO-PRO

The TURBO-Pro System is a lightweight blower assembly ideal for use with compact models in all cutting conditions throughout the entire season.

- Generous 6" diameter outlet hose
- Durable composite impeller housing with reinforced metal plate for high contact debris areas
- Heavy-duty oversized drive and idler pulleys combined with long drive belt allow for cool running and maximum belt life
- Curved steel blade impeller reduces noise
- After initial installation, the quick attach design can be mounted or removed with no tools in a few minutes




TURBO-Pro Blower* — Length: 31" Height: 16.5" Width: 19"
Approximate blower weight: 50 lbs. (44"/48") / 53 lbs. (52") / 55 lbs. (61"), includes mounting bracket

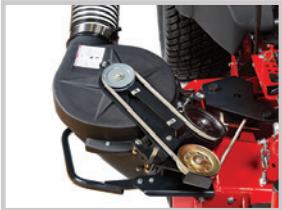

TURBO-PRO MAX

This go-to system for landscapers acts as a lawn vacuum for a clean finish. It quickly mounts to the deck with tool-less stainless steel hardware. It is ideal for use in all conditions found throughout the season.

- Extra wide 7" diameter outlet hose
- Twice the airflow vs. Turbo-Pro for increased capacity on larger decks cutting at higher speeds
- Rugged steel impeller housing designed for extended life
- Heavy-duty oversized drive and idler pulleys combined with a long drive belt allow for cool running and maximum belt life
- After initial installation, the quick attach design can be mounted or removed with no tools in a few minutes

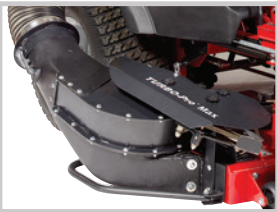

TURBO-Pro Max Blower* — Length: 36" Height: 18" Width: 21"
Approximate blower weight: 72 lbs. (52") / 64 lbs. (61"), includes mounting bracket



FAST-VAC

The rugged impeller utilizes industrial grade bearings, generating phenomenal airflow for use in heavy and wet cutting conditions. Its spindle-driven vertical turbo is narrower, allowing you to get in and out of tight places.

- Extra wide 7" diameter outlet hose
- Super rugged impeller rides on industrial-grade bearings to generate a phenomenal airflow
- Commercial-grade idler and pulleys drive the vertical, spindle-driven turbo resulting in a very narrow profile for improved maneuverability



FAST-Vac Blower* — Length: 36.8" Height: 20.2" Width: 15.2"
Approximate blower weight: 83 lbs. (52") / 85 lbs. (61"), includes mounting bracket



*Dimensions listed are the dimensions of the blower unit and do not represent what they might actually add to the mower.

	S200xt	S120	S50xt	S40	SS100	SS200	SW35	SW25	SW15
Mulch Kit	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Trailer Hitch Kit	Optional	N/A	Optional	N/A	N/A	N/A	N/A	N/A	N/A
LED Light Kit	Optional	Optional	Optional	Optional	Optional	Optional	Optional	N/A	N/A
Flat-Free Caster Tires	Optional	N/A	Optional	N/A	Standard	Standard	Standard	Standard	N/A
Professional Stripe Kit	Optional	Optional	Optional 48" models only	N/A	Optional	Optional	Optional	Optional 48" models only	N/A
Fabric Grass Catcher	N/A	N/A	Optional 36" models only	N/A	N/A	N/A	Optional	Optional	Optional
Metal Grass Catcher	N/A	N/A	Optional 36" models only	N/A	Optional	Optional 52" models only	Optional	Optional	N/A
Service Jack	Optional	Optional	Optional	Optional	N/A	N/A	N/A	N/A	N/A
Weight Kit	N/A	N/A	N/A	N/A	N/A	N/A	Optional	Optional	N/A
Sulky	N/A	N/A	N/A	N/A	N/A	N/A	Optional	Optional	N/A

NOT SEEING THE ATTACHMENT OR ACCESSORY YOU ARE LOOKING FOR?

Contact your local Snapper Pro dealer for more information and installation assistance.



TEXT 'PRO' TO 33988 TO FIND A DEALER

Data rates apply.*



Quiet Power Series				
Model	21725Q	P21725Q	P21850Q	P21850QES
Engine				
Brand	Briggs & Stratton QPT® Series			
Technology	QPT®, Just Check & Add™, ReadyStart®		QPT®, ReadyStart®	QPT®, InStart®, and Our Starting Promise™
Torque	7.25 ft-lbs¹ Gross		8.5 ft-lbs¹ Gross	
Displacement	163cc		190cc	
Choke	ReadyStart® No Prime, No Choke			InStart®
Starting Type	Recoil			Push Button
Mower Configuration				
Side Discharge	Standard			
Mulching	Standard			
Bagging	Standard			
Cutting Width	21"			
Limited Warranty²				
Residential	3-Year			
Commercial	90-Day			

HI VAC®/NINJA® Series				Commercial Series		
Model	2185020	P2185020	P2185020E	RP2185020	CRP218520	CP215520HV
Engine						
Brand	Briggs & Stratton Professional Series™					Honda GXV160
Technology	OHV					
Torque	8.50 ft-lbs¹ Gross					7.1 ft-lbs¹
Displacement	190cc					163cc
Choke	ReadyStart® No Prime, No Choke					Manual Choke
Starting Type	Recoil		Key Electric, Recoil	Recoil		Recoil
Engine Features	Cast-iron Sleeve				Spin-on Oil Filter	
Mower Configuration						
Side Discharge	Optional		Standard		Optional	
Mulching	Optional		Standard	NINJA®		Optional
Bagging	HI VAC®			Optional		HI VAC®
Limited Warranty¹						
Residential	3-Year					
Commercial	90-Day					

*Go to www.snapper.com for terms and privacy information.
¹All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.
²Power rated by engine manufacturer.
³See operator's manual or www.snapper.com for complete warranty details. Length of engine coverage varies by manufacturer.



Walk Mower Specifications

Tractor Specifications



SW15

SW25

SW35

Model	5901863	5901864	5901497	5901436	5901498	5901317	5901261	5901316	5901231	5901232
Engine										
Make	Honda®		Kawasaki®			Kawasaki®				
Model	GXV390		FS541V	FS600V		FX651V			FX730V	
Power Rating (hp)	10.2***		15**	18.5**		20.5**			23.5**	
Displacement (cc)	389		603			726				
Cylinders	1		2			2				
Oil Guard™ System	N/A		N/A			N/A				
Total Fuel Capacity	0.55 gallons		5 gallons			5 gallons				
Mower										
Cutting Width (in.)	32		48	36	48	48	52		61	
Cutting Height (in.)	1.5 - 5		1.5 - 4.5			1.5 - 4.75				
Deck Construction	14 and 12-gauge		10-gauge, fabricated			10-gauge, fabricated				
Greaseable Spindles	Aluminum Greasable		Cast-aluminum			Cast-aluminum			Cast-iron, greasable	
Drive System										
Transaxles	Peerless Axle with different chain driven by Hydro-Gear® RT-310 pump and motor		Hydro-Gear® ZT-3100® with 7" cooling fans			Hydro-Gear® ZT-3100® with 7" cooling fans				
Drive Axles (in.)	0.75		1			1				
Drive Tires (in.)	13 x 5 - 6		20 x 7 - 10			20 x 7 - 10	20 x 8 - 10			
Caster Tires (in.)	10.5 x 3 Fixed Wheel	10.5 x 3 Caster Wheel	9 x 3.5 - 4 Flat-free			11 x 4 - 5 Flat-free				
Ground Speed										
Forward (mph)	0-4		0-6			0-7				
Reverse (mph)	0-2		0-3			0-3				
Dimensions										
Overall Length (in.)	74.25	73.5	75.5	73	71	78.75	75	78.75	75	81.5
Overall Width (in.) (deflector down / up)	44/32.5		59.75 / 52.25	48.5 / 40.75	59.75 / 52.25	62.5 / 49.5		67 / 57		76.5 / 65
Dry Weight (lbs.)	280	285	694	632	694	809		814		888
Operator Control & Comfort Systems										
Seat Package	N/A		N/A			N/A				
ROPS	N/A		N/A			N/A				
Controls	Ergonomic		Standard	CC™	CC™	Standard	CC™	Standard	CC™	Standard
Instrumentation	Speed indicator		Hour meter, speed indicator			Hour meter, speed indicator				
Safety Group / Controls	Blade control bail OPC		Operator presence, centralized foot activated neutral pedals, neutral start safety circuit / CC™ (centralized controls) or standard controls			Operator presence, centralized foot activated neutral pedals, neutral start safety circuit / CC™ (centralized controls) or standard controls				
Parking Brake	Internal transaxle		Internal transaxle			Internal transaxle				
Warranty										
Engine†	See Engine Operator's Manual		3-Year limited manufacturer's warranty							
Balance of Machine‡	2-Year limited warranty commercial use, front-to-rear, parts & labor. Coverage on other components vaies, please see operator's manual for complete details.		2-Year limited warranty commercial use, front-to-rear, parts & labor. Belts, tires, battery, blades: 90 days.							

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

*** Power rated by engine manufacturer.

† Refer to engine operator's manual for engine warranty details.

‡ See operator's manual or www.snapper.com for complete warranty details.

Model	RER-2811525BVE 2691525	RER-3315525BVE 2691526	SPX™ 23/42 2691556
Engine			
Brand	Briggs & Stratton Intek™ Engine		Briggs & Stratton Intek™ V-Twin OHV
Power Rating / Cylinders	11.5' / 1	15.5' / 1	23' / 2
Engine Displacement (cc)	344	500	724
Choke / Throttle	Choke-a-Matic		
Start Type	Key		
Engine Features	Spin-On Oil Filter		
Fuel Tank Capacity (U.S. Gallons)	1.35		3.5
12V Battery (cca)	190		230
Transmission			
Transmission Make	Snapper® Disc Drive		Tuff-Torq® K46
Differential	5-Speed, Disc Drive		Hydro
Speed Control Design	Gear Shift Lever		Foot Pedals
Speed- Fwd / Rev. (mph)	1 - 4.5 / 0 - 1.9		0 - 5.5 / 0 - 3.3
Brake	Friction		Disc
Chassis			
Frame	12-Gauge Steel		
Front Axle	Welded Steel		Cast-Iron
Turning Radius (inches)	28		14
Front Tires (inches)	11 x 4		15 x 6
Rear Tires (inches)	16 x 6.50		20 x 8
Number of Anti-Scalp Wheels	N/A		2
Seat	11" Mid-Back, Adjustable		15" Mid-Back, Adjustable
Steering	Quick Response Handle		Soft Grip, Wheel
Mower Deck			
Deck Type	Stamped Steel		
Cutting Width (inches)	28	33	42
Mower Configuration	Mulching & Side Discharge		Side Discharge
Number of Blades	1		2
Height-of-Cut Range (inches)	1.5 - 4		1.5 - 3.5
Height-of-Cut Positions	5		7
Blade Engagement	Manual Lever		Electric
Deck Suspension	Frame Hung		
Deck Thickness	13-Gauge		14-Gauge
Spindles	Steel		Aluminum
Mower Deck Lift	Mechanical, Single Lever		
Features			
Cruise Control	No		Yes
Headlights	No		LED
Hour Meter	No		Yes
Cup Holder	No		Yes
Fuel Level Indicator	No		Sight
Front Bumper	No		Yes
Dimensions			
Length x Width x Height (inches)	66 x 32 x 40	66 x 37 x 40	74 x 55 x 45
Limited Warranty**			
Residential	3-year		
Commercial	90-day		
Fabricated Mower Deck	N/A		

*All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

**See operator's manual or www.snapper.com for complete warranty details. Length of engine warranty coverage varies by manufacturer.



Tractor Specifications

Zero Turn Specifications



Model	SPX™ 23/46 2691557		SPX™ 25/42 2691663		SPX™ 25/48 2691664		360Z - 19/36 2691499		360Z - 18/36 2691521		360Z - 23/46 2691500		360Z - 21.5/42 2691652		
Engine															
Brand	Briggs & Stratton Intek™ V-Twin OHV			Briggs & Stratton Professional Series™ V-Twin OHV			Briggs & Stratton Professional Series™ OHV		Kawasaki® FR600V V-Twin OHV		Briggs & Stratton Professional Series™ V-Twin OHV		Kawasaki® FR651V V-Twin OHV		
Power Rating / Cylinders	23' / 2			25' / 2			19' / 1		18'' / 2		23' / 2		21.5'' / 2		
Engine Displacement (cc)	724						500		603		724		726		
Choke / Throttle	Choke-a-Matic						Choke-a-Matic		Separate Controls		ReadyStart®		Separate Controls		
Start Type	Key						Key								
Engine Features	Spin-On Oil Filter						Spin-On Oil Filter								
Fuel Tank Capacity (U.S. Gallons)	3.5						3.0								
12V Battery (cca)	230						230								
Transmission															
Transmission Make	Tuff-Torq® K46						Hydro-Gear® EZT®								
Differential	Hydro						Hydro								
Speed Control Design	Foot Pedals						N/A								
Speed- Fwd / Rev. (mph)	0 - 5.5 / 0 - 3.3						0-6 / 0-3						0-7 / 0-4		
Brake	Disc						Integrated								
Chassis															
Frame	12-Gauge Steel						12-Gauge Welded								
Front Axle	Cast-Iron						Welded Steel, Fixed								
Turning Radius (inches)	14						N/A								
Front Tires (Inches)	15 x 6						11 x 4						11 x 6-5		
Rear Tires (Inches)	20 x 8		20 x 10				18 x 6.5				18 x 8.5		20 x 8		
Number of Anti-Scalp Wheels	4						None						1 Front, 1 Rear		
Seat	15" Mid-Back, Adjustable		Premium 15" Mid-Back, Adjustable		15" Contoured Mid-Back, Adjustable		15" Mid-Back, Adjustable						15" Mid-Back Cut & Sew, Adjustable		
Steering	Soft Grip, Wheel						Twin-Lever								
Mower Deck															
Deck Type	Stamped Steel		Fabricated Steel				Fabricated Steel				Stamped Steel		Fabricated Steel		
Cutting Width (inches)	46		42		48		36				46		42		
Mower Configuration	Side Discharge						Side Discharge								
Number of Blades	3		2		3		2				3		2		
Height-of-Cut Range (inches)	1.5 - 4						1.5 - 4.5								
Height-of-Cut Positions	7						7						13		
Blade Engagement	Electric						Electric								
Deck Suspension	Frame Hung						Frame Hung								
Deck Thickness	14-Gauge		12-Gauge				12-Gauge				14-Gauge		12-Gauge		
Spindles	Aluminum						Aluminum								
Mower Deck Lift	Mechanical, Single Lever						Mechanical, Foot Operated								
Features															
Cruise Control	Yes						N/A								
Cargo Bed*	N/A						No		Optional						
Roll Over Protection System (ROPS)	N/A						No								
Rear Hitch Kit	N/A						Optional		Standard						
Headlights	LED						N/A								
Hour Meter	Yes						Yes								
Cup Holder	Yes						Yes								
Fuel Level Indicator	Sight						No								
Front Bumper	Yes						N/A								
Dimensions															
Length x Width x Height (inches)	71 x 59 x 45		74 x 53 x 46		74 x 59 x 46		66 x 50 x 42		70 x 50 x 42		70 x 56 x 42		72 x 55 x 42		
Limited Warranty*															
Residential / Commercial	3-year / 90-day						3-year / 90-day								
Fabricated Mower Deck	N/A		Limited Lifetime				Limited Lifetime				N/A		Limited Lifetime		

*All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
**All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

†See operator's manual or www.snapper.com for complete warranty details. Length of engine coverage varies by manufacturer.
‡50 lb. capacity (360Z) or 100 lb. (560Z), do not overload; do not carry passengers. Available on select models. See operator's manual for details.

Model	360Z - 23/42 2691651	360Z - 23/48 2691653	360Z - 21.5/48 2691654	360Z - 25/52 2691655	360Z - 21.5/52 2691656
Engine					
Brand	Briggs & Stratton Professional Series™ V-Twin OHV	Briggs & Stratton Professional Series™ V-Twin OHV	Kawasaki® FR651V V-Twin OHV	Briggs & Stratton Professional Series™ V-Twin OHV	Kawasaki® FR651V V-Twin OHV
Power Rating / Cylinders	23ˆ / 2	23ˆ / 2	21.5ˆˆ / 2	25ˆ* / 2	21.5ˆˆ* / 2
Engine Displacement (cc)	724		726	724	726
Choke / Throttle	ReadyStart®		Separate Controls	ReadyStart®	Separate Controls
Start Type	Key				
Engine Features	Spin-On Oil Filter				
Fuel Tank Capacity (U.S. Gallons)	3.0				
12V Battery (cca)	230				
Transaxles					
Make	Hydro-Gear® EZT®			Hydro-Gear® ZT-2800®	
Differential	Hydro				
Speed- Fwd / Rev. (mph)	0-7 / 0-4			0-8 / 0-4	
Brake	Integrated				
Chassis					
Frame	12-Gauge Welded				
Front Axle	Welded Steel, Fixed				
Front Tires (inches)	11 x 6-5				
Rear Tires (inches)	20 x 8			20 x 10	
Number of Anti-Scalp Wheels	1 Front, 1 Rear	2 Front			
Seat	Premium 15" Mid-Back, Adjustable			Premium 15" Mid-Back with Arm Rests, Adjustable	
Steering	Twin-Lever				
Mower Deck					
Deck Type	Fabricated Steel				
Cutting Width (inches)	42	48		52	
Mower Configuration	Side Discharge				
Number of Blades	2	3			
Height-of-Cut Range (inches)	1.5 - 4.5				
Height-of-Cut Positions	13				
Blade Engagement	Electric				
Deck Suspension	Frame Hung				
Deck Thickness	12-Gauge	10-Gauge			
Spindle	Aluminum				
Mower Deck Lift	Mechanical, Foot Operated				
Features					
Cargo Bed*	Optional	Yes			
Roll Over Protection System (ROPS)	No				
Rear Hitch Kit	Standard				
Hour Meter	Yes				
Cup Holder	Yes				
Fuel Level Indicator	No			Yes	
Dimensions					
Length x Width x Height (inches)	72 x 55 x 42	72 x 59 x 42		72 x 65 x 43	
Limited Warranty¹					
Residential	3-year				
Commercial	90-day				
Fabricated Mower Deck	Limited Lifetime				

S40		S50xt				S120				
Model	2691738	2691739	5901609	5901611	5901610	5901612	5901865	5901868	5901867	5901862
Engine										
Make	Kawasaki®	Briggs & Stratton®	Kawasaki®		Briggs & Stratton®		Kawasaki®	Kawasaki®	Briggs & Stratton®	Briggs & Stratton®
Model	FR651V	Commercial Series	FX600V		Commercial Series		FR730	FR730	Commercial Series	Commercial Series
Power Rating (hp)	21.5**	25*	19**		25*		24**	24**	25*	25*
Displacement (cc)	726	724	603		724		726		724	
Cylinders	2		2				2			
Oil Guard™ System	N/A		N/A				N/A			
Total Fuel Capacity	5.5 gallons		8 gallons		4 gallons	8 gallons	5.5 gallons			
Mower										
Cutting Width (in.)	48		36	48	36	48	52	61	52	61
Cutting Height (in.)	1.5 - 4.5		1.5 - 4.5				1.5 - 5			
Deck Construction	10-gauge, fabricated		10-gauge, fabricated	iCD™ Cutting System	10-gauge, fabricated	iCD™ Cutting System	iCD™ Cutting System			
Greaseable Spindles	Cast-aluminum		Cast-aluminum				Cast-aluminum			
Drive System										
Transaxles	Hydro-Gear® ZT-2800® with 7" cooling fans		Hydro-Gear® ZT-3100® with 7" cooling fans				Hydro-Gear® ZT-3200® with 7" cooling fans			
Drive Axles (in.)	1		1				1.125			
Drive Tires (in.)	20 x 10-10		20 x 7-10	20 x 10-10	20 x 7-10	20 x 10-10	22 x 11-10			
Caster Tires (in.)	11 x 6-5 Pneumatic		11 x 4-5 Pneumatic				13 x 6.5-6 Pneumatic			
Ground Speed										
Forward (mph)	0-8		0-7				0-10			
Reverse (mph)	0-4		0-4				0-5			
Dimensions										
Overall Length (in.)	69.75		73				80			
Overall Width (in.) (deflector down / up)	58.5 / 53		49.5 / 40.5	64 / 49	49.5 / 40.5	64 / 49	66.75 / 56.5	75.75 / 65.5	66.75 / 56.5	75.75 / 65.5
Dry Weight (lbs.)	721		732	768	732	768	987	1080	987	1080
Operator Control & Comfort Systems										
Seat Package	Mid-back with armrests		Mid-back with armrests				Mid-back with armrests			
ROPS	N/A		N/A				Standard			
Instrumentation	Hour meter, fuel level gauge		Hour meter, fuel level gauge				Hour meter, fuel level gauge			
Safety Group / Controls	Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls		Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls				Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls			
Parking Brake	Internal transaxle		Internal transaxle				Internal transaxle			
Warranty										
Engine**	3-Year limited manufacturer's warranty									
Balance of Machine**	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Belts, tires, battery, blades: 90 days.									

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
¹ See operator's manual or www.snapper.com for complete warranty details. Length of engine coverage varies by manufacturer.
² 50 lb. capacity (360Z) or 100 lb. (560Z), do not overload; do not carry passengers. Available on select models. See operator's manual for details.
ˆˆ Refer to engine operator's manual for engine warranty details.
ˆˆ See operator's manual or www.snapper.com for complete warranty details.



Stand-On Specifications

S200 <i>XT</i>					SS100			SS200	
Model	5901664	5901280	5901665	5901666	5901667	5901801	5901800	5901802	5901803
Engine									
Make	Kawasaki®	Briggs & Stratton®	Vanguard®	Vanguard®	Vanguard®	Vanguard®	Kawasaki®	Vanguard®	
Model	FX801V	Commercial Series	810 EFI	BIG BLOCK™ EFI	BIG BLOCK™ EFI	V-Twin OHV	FX600V	810cc EFI	
Power Rating (hp)	25.5**	27*	28*	37*	37*	23*	19**	28*	
Displacement (cc)	852	810	810	993	993	627	603	810	
Cylinders	2					2		2	
Oil Guard™ System	N/A		Standard			N/A		Standard	
Total Fuel Capacity	10 gallons	5 gallons	10 gallons			6 gallons		8 gallons	
Mower									
Cutting Width (in.)	61				72	36	48	52	61
Cutting Height (in.)	1.5 - 5					1.75 - 5		1.75 - 5	
Deck Construction	iCD™ Cutting System					10-gauge, fabricated		iCD™ cutting system	
Greaseable Spindles	Cast-iron				Hercules™ II	Cast-aluminum		Cast-aluminum	
Drive System									
Transaxles	Hydro-Gear® ZT-5400 Powertrain® with 9" cooling fans					Hydro-Gear® ZT-3400® with 7" cooling fans		Hydro-Gear® ZT-3800® with oil cooling system	
Drive Axles (in.)	1.375					1.125		1.125	
Drive Tires (in.)	24 x 12-12					23 x 8.5 - 12		23 x 10.5 - 12	
Caster Tires (in.)	13 x 6.5-6					11 x 4 - 5 Flat-free		13 x 5-6, Flat-free	
Ground Speed									
Forward (mph)	0-10					0-8		0-10	
Reverse (mph)	0-5					0-4		0-5	
Dimensions									
Overall Length (in.)	80				83.5	65		67	72
Overall Width (in.) (deflector down / up)	87.5				74	49 / 42	59.5 / 54	65 / 54	77 / 64
Dry Weight (lbs.)	1190				1439	813	866	938	998
Operator Control & Comfort Systems									
Seat Package	Premium adjustable with armrests		Adjustable suspension seat with armrests			N/A		N/A	
ROPS	165° foldable					N/A		N/A	
Controls	N/A					3-Speed Control Setting		3-Speed Control Setting	
Instrumentation	Hour meter, fuel level gauge					Hour meter, fuel level gauge		Hour meter, fuel level gauge	
Safety Group / Controls	Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit / adjustable twin steering controls					Integrated forward & reverse control levers with stabilizer bars, Automatic PTO disengagement		Operator presence in platform, Parking brake safety circuit for starting engine, Automatic PTO restart	
Parking Brake	Internal transaxle					Internal transaxle		Internal Transaxle	
Warranty									
Engine†	3-Year limited manufacturer's warranty					3-Year limited manufacturer's warranty			
Balance of Machine‡	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). 3-Year limited warranty (36 months) or 300 hours, whichever occurs first on the 2-belt decks. Warranty parts & labor in first year and parts only in remaining years. (excludes 5901280) Belts, tires, battery, blades: 90 days. (5901280 only)					4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over-shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Transaxles are covered for 3 years (36 months). Coverage on other components varies, please see operator's manual for complete details.			

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

*** Power rated by engine manufacturer.

¹ Refer to engine operator's manual for engine warranty details.

² See operator's manual or www.snapper.com for complete warranty details.



Easy to Use. Easy to Own.

SNAPPER.COM   

Get your digital edition now!



Text DIGITAL to 33988
for a digital copy of this
brochure.

Data rates apply. Go to www.snapper.com for terms and privacy information.



Be careful fueling your small gasoline engines in your mowers. Fuel with ethanol can cause damage to your engine including poor starting, rough running, rust, corrosion and in some cases failure.

For more information visit:
www.LookBeforeYouPump.com

Briggs & Stratton Corporation has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice. Products may vary from images shown.

Briggs & Stratton: All power levels are stated gross horsepower at 3600 rpm per SAE J1940.

Kawasaki: Only Kawasaki Critical Power engines listed in this brochure have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, horsepower-rated in accordance with SAE J2723, and certified by SAE International. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

BRIGGS&STRATTON CORPORATION
MILWAUKEE, WI 53201-0702 USA
(414) 259-5333
Copyright ©2020. All rights reserved.

200004