
SNAPPER.





The Easy Choice.

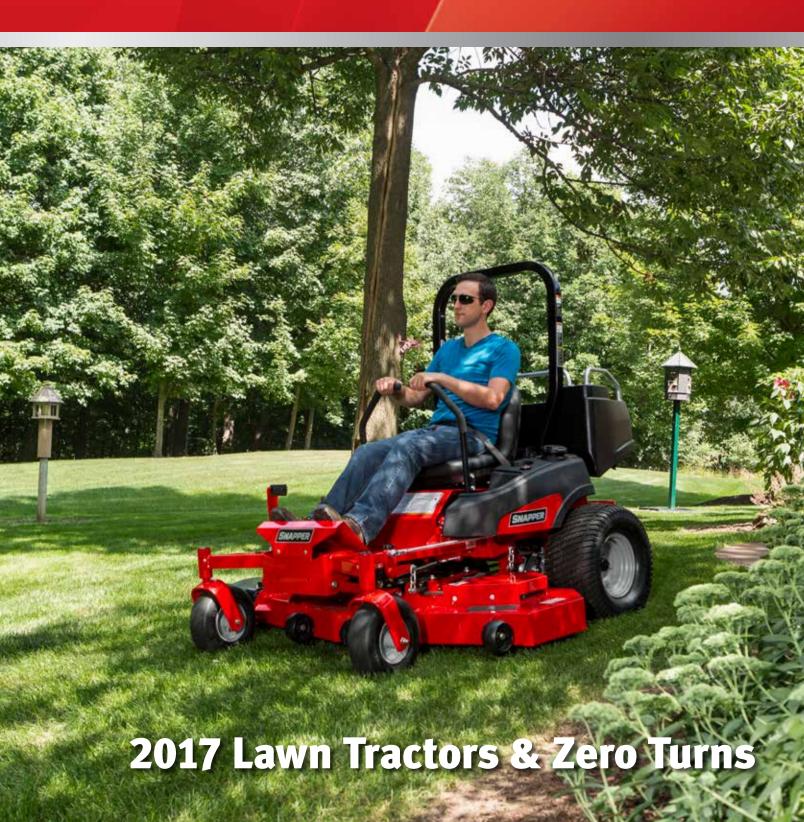

Rear Engine Rider Page 4



SPX[™] Lawn Tractors Page 6



Zero Turn Mowers Page 8



Attachments Page 14

Easy to Use. Easy to Own.

Snapper® Riding Mowers take practical, innovative features and integrate them into a straightforward design that's easy to use and easy to own. It's that simple.

Top 4 Reasons to Choose a Snapper® Dealer



1. Snapper® Dealers are Mower Experts
You can actually talk to someone who really
knows what they're talking about. Friendly,
straight talk you can't get anywhere else.



Try it Out Test drive your new mower to learn how to operate it.



3. Hassle-Free Purchase
Your Snapper® Dealer can get you started with
your new mower including set-up and delivery.



4. Service Support When You Need it Factory-trained service technicians and a stocked parts department will keep you mowing for years to come.



Rear Engine Rider



Tried and True

Some dependable designs are ingeniously simple. Snapper's disc drive transmission uses a spinning plate to power a moveable rubber disc.



HI VAC® Mower Deck

Similar to a vacuum, the HI VAC® Mower Deck efficiently cuts and vacuums up grass clippings for a clean finish. The secret to the cut is the unique blade and rolled deck edge that generates a large volume of air and creates suction.



Optional NINJA® Mulching Blade

Finely mulch your grass with our exclusive NINJA® Blade that features six powerful cutting surfaces. While the blade mulches the grass clippings, the deck design blows them back into the lawn.



Getting Started

Briggs & Stratton® Engines offer the reliability you can count on when mowing the lawn.



Easy-to-Use Design

After over 50 years of proven performance, the rear engine rider has been reinvented to maintain tried and true features with a touch of today's latest innovations. An easy-to-use design with enhanced $features\ still\ delivers\ the\ same\ dependability\ you\ would\ expect\ from\ a\ mowing\ icon.$



User-Friendly Controls

Fingertip controls make the rear engine rider simple to drive.

RE110 28" Deck 11.5 Gross HP*	RE130 33" Deck 13.5 Gross HP*	RE210 33" Deck 15.5 Gross HP'
344cc Briggs & Stratton PowerBuilt™ Engine	500cc Briggs & Stratton PowerBuilt™ Engine	500cc Briggs & Stratton Professional Series™ Engine
HI VAC® Mower Deck	HI VAC® Mower Deck	HI VAC® Mower Deck
Disc Drive Transmission	Disc Drive Transmission	Hydrostatic Transmission
3-Year Limited Warranty [†]	3-Year Limited Warranty [†]	3-Year Limited Warranty [†]

★★★★★ 5 out of 5 stars Small footprint in my garage, GREAT job on my lawn!

"LOVE the handling, speed range (especially with new notched shift plate they provided free), easy change from side chute to mulch, and small storage space needed in my garage. Best rider I've owned for my 1/3 acre yard." -Snapper John

To read more customer reviews like this visit www.snapper.com

An American Classic Reborn.





SPX[™] Series



Step Up to High Value

All-steel construction including the hood, cast-iron front axle and a hydrostatic transmission are hallmarks of SPX™ Tractors - all at a budget-friendly price.



Quick-Adjust Cutting Height

Easy-to-use height-of-cut controls adjust the mower deck for changing grass conditions.



Fabricated Mower Decks

The durable 42" and 48" fabricated mower decks feature welded, heavy-duty steel for non-stop mowing season-after-season. All fabricated decks come with a limited lifetime warranty*.



Step On It

Our responsive foot pedals give you hands-free control over forward and reverse speed. The dash-mounted cruise control lets you set your speed.



Turning Perfection

With a 14" turning radius, you can spend less time mowing and more time enjoying your yard.



A Generation of Power

Briggs & Stratton Professional Series™ V-Twin OHV Engines have full-pressure lubrication and spin-on oil filters for years of trouble-free performance.

SPX [™] 23/42
42" Deck
23 Gross HP*

724cc Briggs & Stratton Intek™ V-Twin Engine

Hydro-Gear® T2-HP™ Hydrostatic

3-Year Limited Warranty[†]

SPX™ 23/46 46" Deck 23 Gross HP*

724cc Briggs & Stratton Intek™ V-Twin Engine

Hydro-Gear® T2-HP™ Hydrostatic

3-Year Limited Warranty[†]

SPX[™] 23/42 42" Fabricated Deck 23 Gross HP*

724cc Briggs & Stratton Professional Series™

V-Twin Engine

Hydro-Gear® T2-HP™ Hydrostatic

Fabricated Deck - Limited Lifetime Warranty[†] 3-Year Limited Warranty[†]

SPX[™] 25/48 48" Fabricated Deck 25 Gross HP*

724cc Briggs & Stratton Professional Series™ V-Twin Engine

Hydro-Gear® T2-HP™ Hydrostatic

Fabricated Deck - Limited Lifetime Warranty[†]

3-Year Limited Warranty[†]

★★★★★ 5 out of 5 stars **Great Ride**

"The performance is simply awesome. This is a very well thought out machine. Turn radius is as advertised, plus the mower is comfortable to operate." - Glennj

To read more customer reviews like this visit www.snapper.com

Straightforward Design.





360Z



Commercially-Inspired

A fully-welded steel frame, thick-walled front axle, durable mower deck, and ball bearings in the caster spindles ensure durability and a great cut.



Engine Options

High performance engine options include Briggs & Stratton Intek™, Briggs & Stratton Professional Series™ with ReadyStart®, and the Kawasaki® FR651V, making sure your zero turn mower has the power to perform year after year.



Heavy-Duty Mower Decks

A durable stamped or fabricated steel mower deck provides non-stop mowing season after season. All fabricated decks come with a limited lifetime warranty.1







The Choice is Yours

The commercial-style footoperated mower deck lift easily lifts and adjusts the mower deck between 13 height-of-cut positions from 1.5 to 4.5 inches.



Snapper's first dirt-hauling, tool-toting, flower-delivering and, of course, grass-cutting zero turn mower. The integrated cargo bed* provides on-the-go versatility and convenience. Plus, the rail system is compatible with numerous third-party UTV/ATV accessories for added utility around your yard.



726cc Kawasaki® FR Series V-Twin Engine

Hydro-Gear® EŹT® Hydrostatic Transaxles

Optional Cargo Bed[‡]

Fabricated Deck -Limited Lifetime Warranty[†]

3-Year Limited Warranty¹

360Z 22/46 46" Deck 22 Gross HP*

724cc Briggs & Stratton Intek™V-Twin

Hydro-Gear® EZT® Hydrostatic Transaxles

Optional Cargo Bed[‡]

3-Year Limited Warranty

360Z 23/42 42" Deck 23 Gross HP*

724cc Briggs & Stratton Professional Series V-Twin Engine with

ReadyStart® Hydro-Gear® EZT® Hydrostatic Transaxles

Optional Cargo Bed[‡]

Fabricated Deck -Limited Lifetime Warranty

3-Year Limited Warranty

360Z 23/48 48" Deck 23 Gross HP*

724cc Briggs & Stratton Professional Series V-Twin Engine with ReadyStart®

Hydro-Gear® EZT® Hydrostatic Transaxles

Cargo Bed[‡]

Fabricated Deck - Limited Lifetime Warranty

3-Year Limited Warranty[†]

360Z 21.5/48 48" Deck 21.5 Gross HP**

726cc Kawasaki® FR Series V-Twin Engine

Hydro-Gear® EZT® Hydrostatic Transaxles

Cargo Bed[‡]

Fabricated Deck - Limited Lifetime Warranty[†]

3-Year Limited Warranty[†]

360Z 25/52 52" Deck 25 Gross HP*

724cc Briggs & Stratton Professional Series V-Twin Engine with ReadvStart®

Hydro-Gear® ZT-2800® Hydrostatic Transaxles

Cargo Bed‡

Fabricated Deck - Limited Lifetime Warranty

3-Year Limited Warranty[†]

*All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton. **All power levels are provided by Kawasaki. †See operator's manual or dealer for complete warranty details. \$50 lb. capacity, do not overload; do not carry passengers. Available on select models. See

★★★★★ 5 out of 5 stars **Best Mower I Ever Owned**

"I have used my new 360Z 42" mower four times and I love it. It's the best mower I have ever owned." - Fud501

To read more customer reviews like this visit www.snapper.com

New Levels of Versatility.





400Z



More Choices

More is better when it comes to cutting height options with 12 different settings from 1.5 to 4.5 inches high. The foot-pedal assisted deck lift makes changing mowing heights easier.



Mow More. Stop Less

Its wide-neck 5.5 gallon fuel tank and easy-off cap holds more fuel for your uninterrupted mowing pleasure.



Engine Protection

This wrap-around steel engine enclosure helps protect critical components.



Turf-Friendly

There's a fine line between turf traction and turf damage. That's why the large, turf-friendly tires leave grass just like you found it, but shorter.



Rugged Durability

With its heavy-duty, all-steel construction frame, contour hugging front axle and reliable Hydro-Gear® Transaxles, this zero turn is built to perform year after year.



Built for harsh zero turn mowing conditions, the Briggs & Stratton® Commercial Series Engine has what it takes to perform, including an advanced debris management system and beefed up cylinder block.

400Z 21.5/48 48" Fabricated Deck

726cc Kawasaki® FR Series V-Twin Engine Hydro-Gear® ZT-2800® Hydrostatic Transaxles Fabricated Deck - Limited Lifetime Warranty[†] 3-Year Limited Warranty[†]

400Z 25/48 48" Fabricated Deck 25 Gross HP**

724cc Briggs & Stratton® Commercial Series V-Twin Engine Hydro-Gear® ZT-2800® Hydrostatic Transaxles Fabricated Deck - Limited Lifetime Warranty[†] 3-Year Limited Warranty[†]

★★★★★ 5 out of 5 stars **BEST EVER**

"The best money I ever spent. I can't keep my son-in-law off my mower." - GW1956

To read more customer reviews like this visit www.snapper.com

The Right Mower for the Big Job.





560Z



Choose Your Power

Built for harsh zero turn mowing conditions, the Briggs & Stratton® Commercial Series Engine has what it takes to perform for years to come. The Kawasaki® FR Series Engine offers smooth power output and durability.



Fast Mowing

Wide, 52" or 61" fabricated mower decks made from thick 10-gauge steel mow grass in no time with speeds up to 9 mph. Welded and reinforced for years of repeat mowing and are also backed by a limited lifetime warranty



Simple Height-of-Cut

Convenient foot-assisted mower deck lift easily adjusts cut-height from 1.5 to 4.5 inches.



Rugged Durability

Commercial-inspired components such as rugged 1.5" x 2" steel front axles, high-performance Hydro-Gear® ZT-3200® Hydrostatic Transaxles and a wrap-around steel bumper ensure this mower is built to handle tough applications.



Added Versatility

The integrated cargo bed* dumps to the rear for easy clean-out and provides on-the-go versatility for dirthauling, tool-toting and flower-delivering. The rail system is also compatible with numerous third-party UTV/ATV accessories for added utility.



Intuitive Controls

Easy-to-use controls are all conveniently located within reach. A wide-mouth gas fill ensures you can easily fill gasoline without any spills.

560Z 24/52 52" Fabricated Deck 24 Gross HP^{**}

726cc Kawasaki® FR Series V-Twin Engine

Hydro-Gear® ZT-3200® Hydrostatic Transaxles

Optional Cargo Bed[‡]

Fabricated Deck - Limited Lifetime Warranty¹

3-Year Limited Warranty[†]

560Z 25/52 52" Fabricated Deck 25 Gross HP*

724cc Briggs & Stratton® Commercial Series V-Twin Engine

Hydro-Gear® ZT-3200® Hydrostatic Transaxles

Optional Cargo Bed[‡]

Fabricated Deck - Limited Lifetime Warranty¹

3-Year Limited Warranty

560Z 24/61 61" Fabricated Deck 24 Gross HP*

726cc Kawasaki® FR Series V-Twin Engine

Hydro-Gear® ZT-3200® Hydrostatic Transaxles

Cargo Bed[‡]

Fabricated Deck - Limited Lifetime Warranty[†]

3-Year Limited Warranty[†]

560Z 25/61 61" Fabricated Deck 25 Gross HP^{*}

724cc Briggs & Stratton® Commercial Series V-Twin Engine

Hydro-Gear® ZT-3200® Hydrostatic Transaxles

Cargo Bed[‡]

Fabricated Deck - Limited Lifetime Warranty[†]

3-Year Limited Warranty[†]





Professional Grade Plus Utility.



It's Easy to Get Attached.

When it comes to yard care, mowing is not always enough, sometimes you want a variety of tools at your fingertips to complete the broad range of tasks for a great looking yard.



		Rear Engine Riders & Lawn Tractors		Zero Turn Mowers			
	ATTACHMENT	Rear Engine Rider	SPX™	360Z	400Z	560Z	
	Mulcher Kit	NINJA® Mulching Blade	44", 46", 48"	42", 46", 48", 52"	48"	52", 61"	
	Single Catcher*	6.5-bu. (28", 33" mower - requires bagging blade)					
CATCHERS &	Twin Catcher*	6.5-bu. (28", 33" mower - requires bagging blade)	6.5-bu. (42" mower)	6.5-bu. (42", 46", 48", 52" mower)	10-bu. (48" mower)		
COLLECTION SYSTEMS	Deck Adapter Kit			42", 46", 48" mower (needed for use with Twin Catcher)			
	Triple Catcher					10-bu. (52", 61" mower)	
	Turbo Attachment		46", 48" mower	52" mower		52", 61" mower (required)	
	Striping Kit				(48" mower)		
	Dump Cart	10-cu. ft.	10-cu. ft.	10-cu. ft.			
	Front & Rear Weight Carriers		Available				
	Suitcase Weights		33-lb.				
	Quick Attach Rear Wheel Weights		31-lb.				
	Hitch Kit			(Standard)	Available		
MULTIPURPOSE	Headlight Kit	Available		Available	Available	Available	
ATTACHMENTS	Arm Rest Kit			Available	Available	Available	
	Cargo Bed**			(Standard on 48", 52")		(Standard on 61")	
	Mesh Seat Kit			Available			
	Hour Meter Kit			Available	(Standard)	(Standard)	
	Caster Tire, Flat Free Kit				Available	Available	
	Dust Cover	Available	Available				
	Front Bumper		(Double Bar)				
SNOW REMOVAL	Single-Stage Snow Blower		42"				
A. IACIIMIEN I 3	Snow Cab		Soft Side (All Vinyl)				
GROUND	Tiller		36" Gas-Powered Tow-Behind				
ENGAGING	Dozer Blade		42" Includes Hitch & Lever				
ATTACHMENTS	Dethatcher		40" Tow-Behind				

WANT TO LEARN MORE?

CONTACT YOUR LOCAL DEALER FOR MORE INFORMATION AND INSTALLATION ASSISTANCE WITH THE RIGHT ATTACHMENT FOR YOUR TRACTOR OR ZERO TURN MOWER.

> **VISIT SNAPPER.COM OR TEXT 'LOCATE' TO 33988** TO LOCATE YOUR SNAPPER® DEALER.

 $^{{\}bf *Select\ collection\ systems\ for\ zero\ turn\ models\ are\ available\ with\ or\ without\ a\ turbo.}$

^{**50-}lb. (360Z) or 100-lb. (560Z) capacity, do not overload; do not carry passengers. Standard on most models. See operator's manual for details Note: Attachments for previous year models and additional attachments through allied equipment manufacturers not shown may be available. Some attachments require additional installation components (i.e. front weights for catchers). Please see dealer for details.

Tractor Specifications

Model	RE110	RE130	RE210
Engine			
Brand	Briggs & Stratton PowerBuilt™ OHV	Briggs & Stratton PowerBuilt™ OHV	Briggs & Stratton Professional Series™ OHV
Power Rating / Cylinders	11.5* / 1	13.5*/1	15.5* / 1
Engine Displacement (cc)	344	500	500
Choke / Throttle	Choke-a-Matic	Choke-a-Matic	Choke-a-Matic
Start Type	Key	Key	Key
Engine Features	N/A	N/A	Spin-On Oil Filter
Fuel Tank Capacity (U.S. Gallons)	2	2	2
12V Battery (cca)	190	190	190
Transmission			
Transmission Make	Snapper® Disc Drive	Snapper® Disc Drive	Hydro-Gear® T2®
Differential	8-Speed, Disc Drive	8-Speed, Disc Drive	Hydro
Speed Control Design	Gear Shift Lever	Gear Shift Lever	Foot Pedals
Speed- Fwd / Rev. (mph)	1 - 4.5 / 0 - 1.9	1 - 4.5 / 0 - 1.9	0 - 5 / 0 - 2
Brake	Friction	Friction	Disc
Chassis			
Frame	12-Gauge Steel	12-Gauge Steel	12-Gauge Steel
Front Axle	Welded Steel	Welded Steel	Welded Steel
Turning Radius (inches)	20	20	20
Front Tires (inches)	11 x 4	11 x 4	13 x 5
Rear Tires (inches)	16 x 6.50	16 x 6.50	16 x 6.50
Number of Anti-Scalp Wheels	N/A	N/A	N/A
Seat	11" Mid-back, Adjustable	11" Mid-back, Adjustable	11" Mid-back, Adjustable
Steering	Wheel	Wheel	Wheel
Mower Deck			
Mower Deck Deck Type	Stamped	Stamped	Stamped
	Stamped 28	Stamped 33	Stamped 33
Deck Type		<u> </u>	
Deck Type Cutting Width (inches)	28	33	33
Deck Type Cutting Width (inches) Mower Configuration	28 HI VAC®	HI VAC®	HI VAC®
Deck Type Cutting Width (inches) Mower Configuration Number of Blades	28 HI VAC®	33 HIVAC® 1	33 HI VAC® 1
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches)	28 HI VAC® 1 1.5 - 4	33 HI VAC® 1 1.5 - 4	33 HI VAC® 1 1.5 - 4
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions	28 HI VAC® 1 1.5 - 4	33 HI VAC® 1 1.5 - 4	33 HI VAC® 1 1.5 - 4
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement	28 HI VAC® 1 1.5 - 4 6 Manual Lever	33 HI VAC® 1 1.5 - 4 6 Manual Lever	33 HI VAC® 1 1.5 - 4 6 Manual Lever
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights Hour Meter	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED No
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights Hour Meter Cup Holder	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED No Yes
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights Hour Meter Cup Holder Fuel Level Indicator	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED No Yes No
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights Hour Meter Cup Holder Fuel Level Indicator Maintenance Monitor	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED No Yes No
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights Hour Meter Cup Holder Fuel Level Indicator Maintenance Monitor Dimensions	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED No Yes No No
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights Hour Meter Cup Holder Fuel Level Indicator Maintenance Monitor Dimensions Length x Width x Height (inches)	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED No Yes No No
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights Hour Meter Cup Holder Fuel Level Indicator Maintenance Monitor Dimensions Length x Width x Height (inches)	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No No No	HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No No No	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED No Yes No No No
Deck Type Cutting Width (inches) Mower Configuration Number of Blades Height-of-Cut Range (inches) Height-of-Cut Positions Blade Engagement Deck Suspension Deck Thickness Spindles Mower Deck Lift Features Cruise Control Headlights Hour Meter Cup Holder Fuel Level Indicator Maintenance Monitor Dimensions Length x Width x Height (inches) Limited Warranty† Residential	28 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No No No 66 x 32 x 43	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No Optional No Yes No No 66 x 37 x 43	33 HI VAC® 1 1.5 - 4 6 Manual Lever Frame Hung 13-Gauge Steel Mechanical, Single Lever No 1-Bulb LED No Yes No No 1-66 x 37 x 43

SPX™ 23/42	SPX™ 23/46	SPX™ 23/42	SPX™ 25/48
Briggs & Stratton Intek™ V-Twin OHV	Briggs & Stratton Intek™ V-Twin OHV	Briggs & Stratton Professional Series™ V-Twin OHV	Briggs & Stratton Professional Series™ V-Twin OHV
23* / 2	23* / 2	23* / 2	25* / 2
724	724	724	724
Choke-a-Matic	Choke-a-Matic	Choke-a-Matic	Choke-a-Matic
Key	Key	Key	Key
Spin-On Oil Filter	Spin-On Oil Filter	Spin-On Oil Filter	Spin-On Oil Filter
3.5	3.5	3.5	3.5
230	230	230	230
Hydro-Gear® T2-HP™	Hydro-Gear® T2-HP™	Hydro-Gear® T2-HP™	Hydro-Gear® T2-HP™
Hydro	Hydro	Hydro	Hydro
Foot Pedals	Foot Pedals	Foot Pedals	Foot Pedals
0 - 5.5 / 0 - 3.3	0 - 5.5 / 0 - 3.3	0 - 5.5 / 0 - 3.3	0 - 5.5 / 0 - 3.3
Disc	Disc	Disc	Disc
12-Gauge Steel	12-Gauge Steel	12-Gauge Steel	12-Gauge Steel
Cast-Iron	Cast-Iron	Cast-Iron	Cast-Iron
14	14	14	14
15 x 6	15 x 6	15 x 6	15 x 6
20 x 8	20 x 8	20 x 10	20 x 10
2	4	4	4
15" Mid-back, Adjustable	15" Mid-back, Adjustable	15" Mid-back, Adjustable	15" Mid-back, Adjustable
Soft Grip, Wheel	Soft Grip, Wheel	Soft Grip, Wheel	Soft Grip, Wheel
Soft Grip, Wheet	Soft Grip, Wilcet	Soft drip, wheet	Soft diff, wheet
Stamped Steel	Stamped Steel	Fabricated Steel	Fabricated Steel
Stamped Steel 42	Stamped Steel 46	Fabricated Steel 42	Fabricated Steel 48
42	46	42	48
	46 Side Discharge	42 Side Discharge	48 Side Discharge
42 Side Discharge 2	46 Side Discharge 3	42 Side Discharge 2	48 Side Discharge 3
42 Side Discharge 2 1.5 - 4	46 Side Discharge 3 1.5 - 4	42 Side Discharge 2 1.5 - 4	48 Side Discharge 3 1.5 - 4
42 Side Discharge 2 1.5 - 4 7	46 Side Discharge 3 1.5 - 4 7	42 Side Discharge 2 1.5 - 4 7	48 Side Discharge 3 1.5 - 4 7
42 Side Discharge 2 1.5 - 4 7 Electric	46 Side Discharge 3 1.5 - 4 7 Electric	42 Side Discharge 2 1.5 - 4 7 Electric	48 Side Discharge 3 1.5 - 4 7 Electric
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever
Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No
Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes
Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight
Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes
Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No
Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight
Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No 71 x 55 x 45	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No 71 x 58 x 45	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No 71 x 61 x 45	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No 71 x 60 x 45
42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	46 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 14-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	42 Side Discharge 2 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No	48 Side Discharge 3 1.5 - 4 7 Electric Frame Hung 12-Gauge Aluminum Mechanical, Single Lever Yes 2-Bulb Incandescent No Yes Sight No

Zero Turn Specifications

Pages Displacement (cd) 72A							
	Model	360Z - 22/46	360Z - 23/42	360Z - 21.5/42	360Z - 23/48	360Z - 21.5/48	360Z - 25/52
	Engine						
Pages Displacement (cc) 72A	Brand		Professional Series™		Professional Series™		Professional Series™
Choke / Thortite	Power Rating / Cylinders	22*/2	23* / 2	21.5** / 2	23* / 2	21.5** / 2	25* / 2
Sear Type	Engine Displacement (cc)	724	724	726	724	726	724
Ingine Features Spin-On Oil Filter Spin-On O	Choke / Throttle	Choke-a-Matic	ReadyStart®	Separate Controls	ReadyStart®	Separate Controls	ReadyStart®
Treat Trins (Capectry (U.S. Gallons) 3.0 3	Start Type	Key	Key	Key	Key	Key	Key
127 Battery (cca) 230	Engine Features	Spin-On Oil Filter	Spin-On Oil Filter	Spin-On Oil Filter	Spin-On Oil Filter	Spin-On Oil Filter	Spin-On Oil Filter
Transacte	Fuel Tank Capacity (U.S. Gallons)	3.0	3.0	3.0	3.0	3.0	3.0
	12V Battery (cca)	230	230	230	230	230	230
	Transaxles						
Speed- Find / Rev. (mpt) 0-6/0-3 0-7/0-4 0-7/0-4 0-7/0-4 0-7/0-4 0-7/0-4 0-8/0-4 mean me	Transaxle Make	Hydro-Gear® EZT®	Hydro-Gear® EZT®	Hydro-Gear® EZT®	Hydro-Gear® EZT®	Hydro-Gear® EZT®	Hydro-Gear® ZT-2800®
Brake Integrated Integrated<	Differential	Hydro	Hydro	Hydro	Hydro	Hydro	Hydro
Chassis Frame 12-Gauge Welded 12-Gauge 12-Gauge Welded 12-Gauge	Speed- Fwd / Rev. (mph)	0-6 / 0-3	0-7 / 0-4	0-7 / 0-4	0-7 / 0-4	0-7 / 0-4	0-8 / 0-4
Frame	Brake	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated
	Chassis						
Property From tries (inches) 11x4 11	Frame	12-Gauge Welded	12-Gauge Welded	12-Gauge Welded	12-Gauge Welded	12-Gauge Welded	12-Gauge Welded
Rear Tires (inches)	Front Axle	Welded Steel, Fixed	Welded Steel, Fixed	Welded Steel, Fixed	Welded Steel, Fixed	Welded Steel, Fixed	Welded Steel, Fixed
Number of Anti-Scalp Wheels	Front Tires (inches)	11 x 4	11 x 4	11 x 4	11 x 4	11 x 4	11 x 4
	Rear Tires (inches)	18 x 8.5	20 x 8	20 x 8	20 x 8	20 x 8	20 x 10
Steering Adjustable Twin-Lever Table Table Table Table Table Table Twin-Lever Side Dischare Table Sid	Number of Anti-Scalp Wheels	2 Front	1 Front, 1 Rear	1 Front, 1 Rear	2 Front	2 Front	2 Front
Mower Deck Type	Seat	,		· ·			· ·
Dock Type Stamped Steel Fabricated Steel	Steering	Twin-Lever	Twin-Lever	Twin-Lever	Twin-Lever	Twin-Lever	Twin-Lever
Cutting Width (Inches) 46 42 42 48 48 52 Mower Configuration Side Discharge 15-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5 1.5-4.5	Mower Deck						
Mower Configuration Side Discharge Si	Deck Type	Stamped Steel	Fabricated Steel	Fabricated Steel	Fabricated Steel	Fabricated Steel	Fabricated Steel
Number of Blades 3 2 2 3 3 3 Height-of-Cut Range (Inches) 1.5 - 4.5 1	Cutting Width (inches)	46	42	42	48	48	52
Height-of-Cut Range (Inches) 1,5 - 4,5	Mower Configuration	Side Discharge	Side Discharge	Side Discharge	Side Discharge	Side Discharge	Side Discharge
Height-of-Cut Positions 13 13 13 13 13 13 13 1	Number of Blades	3	2	2	3	3	3
Blade Engagement Electric Deck Suspension Frame Hung Pock Thickness 14-Gauge 12-Gauge 12-Gauge 12-Gauge 12-Gauge 10-Gauge Spindle Aluminum Aluminum Aluminum Aluminum Aluminum Aluminum Aluminum Aluminum Mower Deck Lift Mechanical, Foot Operated Ope	Height-of-Cut Range (inches)	1.5 - 4.5	1.5 - 4.5	1.5 - 4.5	1.5 - 4.5	1.5 - 4.5	1.5 - 4.5
Deck SuspensionFrame HungFrame HungPodeSpindleAluminumAluminumAluminumAluminumAluminumAluminumAluminumAluminumAluminumAluminumMower Deck LiftMechanical, Foot OperatedMechanical, Foot Operat	Height-of-Cut Positions	13	13	13	13	13	13
Deck Thickness 14-Gauge 12-Gauge 12-Gauge 12-Gauge 10-Gauge Spindle Aluminum <	Blade Engagement	Electric	Electric	Electric	Electric	Electric	Electric
SpindleAluminumAluminumAluminumAluminumAluminumAluminumAluminumAluminumAluminumAluminumMower Deck LiftMechanical, Foot OperatedMechanical, Foot OperatedMechanical, Foot OperatedMechanical, Foot OperatedMechanical, Foot OperatedMechanical, Foot OperatedMechanical, Foot OperatedFeatures***Cargo Bed************************************	Deck Suspension	Frame Hung	Frame Hung	Frame Hung	Frame Hung	Frame Hung	Frame Hung
Mower Deck Lift Mechanical, Foot Operated Mechanical, Foot Operated Operate	Deck Thickness	14-Gauge	12-Gauge	12-Gauge	12-Gauge	12-Gauge	10-Gauge
FeaturesCargo Bed¹OperatedOperatedOperatedOperatedOperatedCargo Bed¹OptionalOptionalYesYesYesROPSNoNoNoNoNoNoRear BumperYesYesYesYesYesHour MeterOptionalOptionalOptionalOptionalOptionalOptionalCup HolderYesYesYesYesYesFuel Level IndicatorNoNoNoNoNoNoDimensionsLength x Width x Height (inches)72 x 59 x 4172 x 55 x 4272 x 55 x 4272 x 59 x 4272 x 59 x 4272 x 65 x 43Limited Warranty¹Residential3 - year3 - year3 - year3 - year3 - year3 - yearCommercial90 - day90 - day90 - day90 - day90 - day90 - day90 - day	Spindle	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cargo Bed¹ Optional Optional Optional Yes Yes Yes ROPS No No No No No No No Rear Bumper Yes Yes Yes Yes Yes Yes Yes Hour Meter Optional No Yes Yes Yes Yes Yes Yes <th>Mower Deck Lift</th> <td>· ·</td> <td>· ·</td> <td>· ·</td> <td>· ·</td> <td>· ·</td> <td>· ·</td>	Mower Deck Lift	· ·	· ·	· ·	· ·	· ·	· ·
ROPS No Rear Bumper Yes	Features						
Rear Bumper Yes Yes Yes Yes Yes Hour Meter Optional	Cargo Bed [‡]	Optional	Optional	Optional	Yes	Yes	Yes
Hour Meter Optional Optional Optional Optional Optional Optional Optional Optional Optional Cup Holder Yes Yes Yes Yes Yes Yes Fuel Level Indicator No No No No No No Yes Dimensions Length x Width x Height (inches) 72 x 59 x 41 72 x 55 x 42 72 x 59 x 42 72 x 59 x 42 72 x 65 x 43 Limited Warranty* Residential 3-year 3-year 3-year 3-year 3-year 3-year 90-day	ROPS	No	No	No	No	No	No
Cup Holder Yes Pes	Rear Bumper	Yes	Yes	Yes	Yes	Yes	Yes
Fuel Level Indicator No No No No No Yes Dimensions Length x Width x Height (inches) 72 x 59 x 41 72 x 55 x 42 72 x 59 x 42 72 x 59 x 42 72 x 59 x 42 72 x 65 x 43 Limited Warranty¹ Residential 3-year 3-year 3-year 3-year 3-year 3-year 90-day 90-day 90-day 90-day 90-day 90-day	Hour Meter	Optional	Optional	Optional	Optional	Optional	Optional
Dimensions	Cup Holder	Yes	Yes	Yes	Yes	Yes	Yes
Length x Width x Height (inches) 72 x 59 x 41 72 x 55 x 42 72 x 55 x 42 72 x 59 x 42 72 x 59 x 42 72 x 65 x 43 Limited Warranty* Residential 3-year 3-year 3-year 3-year 3-year 90-day 90-day 90-day 90-day 90-day 90-day 90-day 90-day	Fuel Level Indicator	No	No	No	No	No	Yes
Limited Warranty [†] Residential 3-year 3-year 3-year 3-year 3-year 3-year 9-day 90-day 90-day<	Dimensions						
Residential 3-year 3-year 3-year 3-year 3-year 3-year 3-year 9-day 90-day 90-day 90-day 90-day 90-day 90-day 90-day 90-day	Length x Width x Height (inches)	72 x 59 x 41	72 x 55 x 42	72 x 55 x 42	72 x 59 x 42	72 x 59 x 42	72 x 65 x 43
Commercial 90-day 90-day 90-day 90-day 90-day 90-day	Limited Warranty [†]						
	Residential	3-year	3-year	3-year	3-year	3-year	3-year
Fabricated Mower Deck N/A Lifetime Lifetime Lifetime Lifetime Lifetime	Commercial	90-day	90-day	90-day	90-day	90-day	90-day
	Fabricated Mower Deck	N/A	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime

	/007 24 F//0	4007 25/40	F (07 2 4 / F 2	F (07 2F /F 2	5607 24/64	5/07 25//1
OHY Commercial Series V-Troin OH	400Z - 21.5/48	400Z - 25/48	560Z - 24/52	560Z - 25/52	560Z - 24/61	560Z - 25/61
OHY Commercial Series V-Troin OH	L'AFRANCE :	B	L'® FD======	D: 0.51 :: **	I/ 1/0 FD	D
Description						
226 720 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Separate Controls Key Spin-on Oil Iller Spin-on Cantrols Spin-on Cantrols Spin-on Cantrols Spin-on Oil Iller Spin-on Oil Iller Spin-on Oil Iller Medicant	21.5** / 2	25* / 2	24** / 2	25* / 2	24** / 2	25* / 2
Roy Roy Key Key Key Key Key Key Spin-dn Oil Filter Mode <	726	724	726	724	726	724
Spin-On Oil Filter Polity On Oil Filter Polity Oil Oil Filter Polity Oil	Separate Controls					
5.5 5.5 5.5 5.5 5.5 5.5 5.5 5.5 300 <td>Key</td> <td>Key</td> <td>Key</td> <td>Key</td> <td>Key</td> <td>Key</td>	Key	Key	Key	Key	Key	Key
100 100	Spin-On Oil Filter					
	5.5	5.5	5.5	5.5	5.5	5.5
Hydro	300	300	300	300	300	300
Hydro						
0.8/0.4 0.8/0.4 0.9/0.4 <t< td=""><td>Hydro-Gear® ZT-2800®</td><td>Hydro-Gear® ZT-2800®</td><td>Hydro-Gear® ZT-3200®</td><td>Hydro-Gear® ZT-3200®</td><td>Hydro-Gear® ZT-3200®</td><td>Hydro-Gear® ZT-3200®</td></t<>	Hydro-Gear® ZT-2800®	Hydro-Gear® ZT-2800®	Hydro-Gear® ZT-3200®	Hydro-Gear® ZT-3200®	Hydro-Gear® ZT-3200®	Hydro-Gear® ZT-3200®
Separate Lever	Hydro	Hydro	Hydro	Hydro	Hydro	Hydro
11-Gauge Welded 11-Gauge W	0 - 8 / 0 -4	0 - 8 / 0 -4	0 - 9 / 0 - 4	0-9/0-4	0-9/0-4	0 - 9 / 0 - 4
Welded Steel, Fixed 13x 5 13x 6 22x 11 22x 11 22x 11 22x 11 22x 11 13x 6 13x 6 14x 6 1	Separate Lever					
Welded Steel, Fixed 13x 5 13x 6 22x 11 22x 11 22x 11 22x 11 22x 11 13x 6 13x 6 14x 6 1						
11 x 4	11-Gauge Welded					
20 x 10 20 x 10 22 x 11 22 x 11 22 x 11 1 Front 4 Front 18" High-back, Adjustable 48 22 28 28 28 28 28 28 28 28		1	-	-	-	-
1 Front 1 Front 4 Front 4 Front 4 Front 4 Front 4 Front 4 Front 18" High-back, Adjustable 28 To Compose the Proposed of Composed Steel Proposed Steel P	11 x 4	11 x 4	13 x 5	13 x 5	13 x 5	13 x 5
18" High-back, Adjustable	20 x 10					
Twin-Lever Twin-Le	1 Front	1 Front	4 Front	4 Front	4 Front	4 Front
Twin-Lever Twin-Le	18" High-back, Adjustable					
Fabricated Steel Fabricated Steel Pick Discharge Side Discharge						
48 48 52 52 61 61 Side Discharge 10-64.5 10-64.5 10-64.5 10-64.5 10-64.5 11-64.6 10-64.6 10-64.6 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 1	Twin-Lever	Twin-Lever	Twin-Lever	Twin-Lever	Twin-Lever	Twin-Lever
48 48 52 52 61 61 Side Discharge 10-64.5 10-64.5 10-64.5 10-64.5 10-64.5 11-64.6 10-64.6 10-64.6 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 10-64.0 1						
Side Discharge Side Discharge Side Discharge Side Discharge Side Discharge 3 3 3 3 3 3 1.5 - 4.5<	Fabricated Steel					
3 3 3 3 3 3 1.5 - 4.5 1.6 1.6 1.6 1.6 1.6 <td< td=""><td>48</td><td>48</td><td>52</td><td>52</td><td>61</td><td>61</td></td<>	48	48	52	52	61	61
1.5 - 4.5 1.5 - 4.5 1.5 - 4.5 1.5 - 4.5 1.5 - 4.5 12 12 12 12 12 12 Electric Electric Electric Electric Electric Frame Hung In-Gauge 10-Gauge 10-Gauge 10-Gauge 10-Gauge 10-Gauge 10-Gauge 10-Gauge Aluminum Aluminum Aluminum Aluminum Aluminum Aluminum Aluminum Aluminum Aluminum Mechanical, Foot Operated Mechanical, Foot Operated<	Side Discharge					
12 12 12 12 12 12 12 12 12 Electric <	3	3	3	3	3	3
Electric Electric	1.5 - 4.5	1.5 - 4.5	1.5 - 4.5	1.5 - 4.5	1.5 - 4.5	1.5 - 4.5
Frame Hung 10-Gauge <	12	12	12	12	12	12
10-Gauge	Electric	Electric	Electric	Electric	Electric	Electric
Aluminum	Frame Hung					
Mechanical, Foot Operated Ves Yes Yes <t< td=""><td>10-Gauge</td><td>10-Gauge</td><td>10-Gauge</td><td>10-Gauge</td><td>10-Gauge</td><td>10-Gauge</td></t<>	10-Gauge	10-Gauge	10-Gauge	10-Gauge	10-Gauge	10-Gauge
No No Optional Optional Yes Yes No No Yes Yes Yes Yes Yes Yes Yes Yes Yes 81x68x68 81x68x68 87x77x68 87x77x68 3-year 3-year 3-year 3-year 3-year 90-day 90-day 90-day 90-day 90-day	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
No No Yes Yes Yes Yes Yes Yes Yes Yes Yes 69 x 63 x 42 81 x 68 x 68 81 x 68 x 68 87 x 77 x 68 87 x 77 x 68 3-year 3-year 3-year 3-year 3-year 3-year 90-day	Mechanical, Foot Operated					
No No Yes Yes Yes Yes Yes Yes Yes Yes Yes 69 x 63 x 42 81 x 68 x 68 81 x 68 x 68 87 x 77 x 68 87 x 77 x 68 3-year 3-year 3-year 3-year 3-year 3-year 90-day						
No No Yes Yes Yes Yes Yes Yes Yes Yes Yes 69 x 63 x 42 81 x 68 x 68 81 x 68 x 68 87 x 77 x 68 87 x 77 x 68 3-year 3-year 3-year 3-year 3-year 3-year 90-day						
Yes Yes Yes Yes Yes 69 x 63 x 42 81 x 68 x 68 81 x 68 x 68 87 x 77 x 68 87 x 77 x 68 3-year 3-year 3-year 3-year 3-year 90-day			-	1		
Yes Yes <td>No</td> <td>No</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td>	No	No	Yes	Yes	Yes	Yes
Yes Yes <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td>	Yes	Yes	Yes	Yes	Yes	Yes
Yes Yes <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td>	Yes	Yes	Yes	Yes	Yes	Yes
69 x 63 x 42 69 x 63 x 42 81 x 68 x 68 81 x 68 x 68 87 x 77 x 68 87 x 77 x 68 3-year 3-year 3-year 3-year 3-year 90-day 90-day 90-day 90-day 90-day 90-day	Yes	Yes	Yes	Yes	Yes	Yes
3-year 3-year 3-year 3-year 3-year 3-year 90-day 90-day 90-day 90-day 90-day 90-day	Yes	Yes	Yes	Yes	Yes	Yes
3-year 3-year 3-year 3-year 3-year 3-year 90-day 90-day 90-day 90-day 90-day 90-day						
90-day 90-day 90-day 90-day 90-day 90-day	69 x 63 x 42	69 x 63 x 42	81 x 68 x 68	81 x 68 x 68	87 x 77 x 68	87 x 77 x 68
90-day 90-day 90-day 90-day 90-day 90-day						
	3-year	3-year	3-year	3-year	3-year	3-year
Lifetime Lifetime Lifetime Lifetime Lifetime Lifetime	90-day	90-day	90-day	90-day	90-day	90-day
	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime



Easy to Use. Easy to Own.

Get your digital edition now!

Text DIGITAL to 33988 for a digital copy of this brochure.

Data rates apply.

Briggs & Stratton Corporation has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice. Products may vary from images shown.



Be careful fueling your small gasoline engines in your mowers. Fuel with ethanol can cause damage to your engine including poor starting, rough running, rust, corrosion and in some cases failure. For more information visit: www.LookBeforeYouPump.com

> **BRIGGS & STRATTON CORPORATION** Post Office Box 702

Milwaukee, WI 53201 USA (414) 259-5333

Copyright ©2017. All rights reserved.

SNAPPER.COM F



